

Antari
FOG MACHINE

Antari 2015 Antari Product Guide



All of our effects are inspired by Mother Nature.

All of our machines are designed to respect her.



COMPANY PROFILE

Welcome to the future of Antari.

Antari is dedicated to manufacturing and providing the highest quality fog machines from its beginning in 1984.

As a sole professional fog machine manufacturer, Antari positions itself as a world class industry leader, listens to the global market needs, and combines many years of experience with its active research and development program to enable the continuous introduction of innovative products.

Continually developing new products to meet customers' expectations has been a long tradition at Antari, as well as the emphasis on developing products that meet important environmental concerns and energy saving criteria. Antari takes seriously our corporate social responsibility and strives to incorporate innovations that "add green" as well as commercial value to every Antari product.

Continuous innovation as well as taking green concepts into consideration are strong beliefs adhered by the entire Antari team.

On behalf of every member of the Antari Team, Mr. P.F. Hung, the CEO, sincerely expresses his gratitude to all business partners, distributors and friends who have been such loyal supporters throughout the years. Antari will remain focused on providing the highest possible quality and the most innovative designs as the engines of continued growth. High quality, pure fog will guarantee the best effects produced, the functionalities of your surrounding equipments, and most of all, user's health.

Our mission will be providing Total Effects Solution specializing in Fog.

CONTENTS

9 F-7 Smaze



13 M-7 RGBA



17 Fire Training FT-100



21 M-4 Fog Jet



25 F-1 Fazer



29 W-715 Fog Jet



33 Z-1520 RGB



37 F-5D Fazer



41 Z-350 Fazer



45 WiFi-Series WiFi800



49 IP-Series IP-1000, IP-1500



53 W-Series W-101, W-508, W-510, W-515, W-530



61 M-Series M-5, M-8, M-10



67 ZII-Series Z-800II, Z-1020, Z-1000II, Z-1200II, Z-1500II, Z-3000II



77 Effects Machine M-1 Mobile Fogger, LCU-1 Liquid Control Unit, S-120 Foam Machine



81 HZ-Series HZ-100, HZ-350 HZ-400, HZ-500



87 Snow-Series S-100X, S-200X, SW-250



93 Bubble Machine B-100, B-100X, B-200



97 Low Fog Machine ICE-101, DNG-100, DNG-200



103 Antari Fan AF-3, AF-5



107 Liquid



109 Control Module & Remotes



117 Accessories



117 FlightCase



119



Antari New Products



F-7 SMAZE



M-7 RGBA



FT-100



M-4



F-1 FAZER



F-5D FAZER

The Ultimate Touring Atmospheric Effect
The First Fog and Haze Hybrid presented by Antari

F7 SMAZE



F-7 Smaze

Designed for large venue, the F-7 Smaze machine offers the all-in-one solution for your needs.

With its switchable Fog and Faze mode, the machine is capable of producing strong powerful fog or thin layer of haze to fill up the venue in mins.

Equipped with our latest air pump technology enabling self-cleaning feature also produce fine dry fog. The built-in adjustable fan allows you to direct the fog easily.

Versatile control option includes Wireless DMX, DMX and stand alone to meet any control needs. Designed into a road case make this tour ready unit to be transported at ease.

Features

1. All in one Fog + Faze machine, switch between fog and faze effect
2. Tour ready rugged design
3. Built-in high velocity fan with adjustable output angle
4. Self cleaning function
5. Built-in Wireless DMX
6. 3 channel DMX control (Mode, Fog/Faze volume, Fan volume)
7. Auto sensing frequency

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 1,650 W
- Initial Heat-Up Time : 6 mins
- Fluid Consumption Rate : 140 ml/min (Fog Mode)
28 ml/min (Faze Mode)
- Tank Capacity : 5 liters
- Control Options : On-Board Control Panel \ DMX \ W-DMX
- DMX Channel Occupied : 3 Channels
- Channel 1 : Fog / Haze Mode
- Channel 2 : Output Volume
- Channel 3 : Fan Volume
- Weight : 52.5 Kg
- Dimensions (mm) : L 710 W 412 H 710
- Liquid Used : Antari FLG-5E Liquid



FLG-5E
Heavy Fog Liquid



Control Panel
DMX, W-DMX



On-Board
Control Panel



Multi-angle Fan
9 Sections Available



Digital Control Panel &
Huge Room for
Fluid Reservoir



Haze Effect with
Fan at 45° position



Haze Effect with
Fan at 90° position



Fog Effect at
Full Swing

F-7 SMAZE





M-7  **RGBA**
STAGE FOGGER

M-7 RGBA Stage Fogger

The new M-7 RGBA is the updated version of the original M-7 LED fog machine. Amber LEDs have been added up to M-7RGBA which allows its color mixing even more attractive. Plus, optional W-DMX function is available on M-7RGBA.

Features

1. RGBA LEDs on board.
2. Optional Wireless DMX available.
3. New structure design for multiple angle rigging
4. Auto sense frequency
5. Fluid tank compartment for ease of transportation
6. Huge output volume with high pigments LED colors
7. Great fit for Stage purpose

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Breaker : 120V, 15A 250V 230V, 9A 250V
- Power Consumption : 1,550 W
- Initial Heat-Up Time : 5 mins
- Coverage Volume : Height 5 Meters, Width 1 Meter
- Max Operating Time : 8 seconds burst
- Fluid Consumption Rate : 150 ml / Min
- Tank Capacity : 2.4 liter
- Control Options : On-Board Control Panel
Wireless Remote DMX Master / Slave
- Remote Included : W-2 Wireless Transmitter
- Weight : 11.5 Kg
- Dimensions (mm) : L 345 W 193 H 385.7
- Liquid Used : Antari FLC Water-based Fluid



• Red Light Effects



• Green Light Effects



• Blue Light Effects




• Amber Lights Effects



• RGB Light Effects



• FLC-5 Water Based Fluid



M-7 RGBA
STAGE FOGGER

• Two m10 threads at the bottom allow machine to be rigged in different positions. Clamps are not included



FT-100 Fire Training Fog Machine

FT-100 is the first fog machine from Antari specifically designed for fire training purpose.

Main Features:

1. Two rotary knobs and a LCD screen are equipped on FT-100. These allow users to set and control fog output volume and timer settings with ease, even when wearing heavy-duty gloves.
2. A 1500 Watt heater block is capable of generating high volume thick fog in short time to simulate dense fog at fires.
3. A wireless remote controller included.
4. The red paint finish gives FT-100 the identity of being part of fire industry.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Breaker : AC-120V, 15A/250V AC-230V, 7A/250V
- Power Consumption : 1,500W
- Output : 20000 cu.ft / min
- Initial Heat-Up Time : 10 mins
- Fluid Consumption Rate : 100 ml/ min
- Tank Capacity : 6 liters
- Control Options : Z-3 Remote
- Weight : 14.2 Kg
- Dimensions (mm) : L 580 x W 278.2 x H 264.5
- Liquid Used : Antari FLP Fog Liquid



• FT-100 Effect



• Control Panel



• FLP Fog Liquid



• Z-3 Remote (Optional)





M-4 STAGE FOGGER

M-4 Stage Fogger

The mechanical design of M-4 is simply perfect for transporting as the fluid tank is kept in the separate compartment inside the machine.

Built-in wireless DMX make it complete wire free to save the hassle of cables. With the update auto sensing frequency enables the machine to automatically adjust its frequency to give best performance.

Features

1. Optional W-DMX or Wireless Remote available
2. New structure design for multiple angle rigging
3. Auto sense frequency
4. Fluid tank compartment for ease of transportation
5. Solid sturdy structure of machine body convenient for transportation
6. Huge output volume
7. Great fit for any renting purposes

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Breaker : AC-120V, 15A/250V AC-230V, 7A/250V
- Power Consumption : 1,500W
- Output : Height 5 Meters, Width 1 Meter
- Initial Heat-Up Time : 5 mins
- Fluid Consumption Rate : 150 ml/ min
- Tank Capacity : 2.4 liters
- Control Options : On-board Control Panel
W-1 Wireless Remote , DMX , W-DMX
- Weight : 11 Kg
- Dimensions (mm) : L 345 x W 193 x H 385.7
- Liquid Used : Antari FLC water-based Fluid



• Two m10 threads at the bottom allow machine to be rigged in different positions. Clamps are not included



• M-4 Control Panel



• M-4 Effect



• FLC-5 Water Based Fluid

M-4

STAGE FOGGER





F-1 FAZER

F-1 Fazer

A complete make over of X-310, we proudly present you F-1 Fazer equip with new technology and features from the F-Series family.

F-FAZER

The air pump system enhance and smooth the mixture of fog liquid and air to produce fine, dry fog with minimal fluid consumption. Also enable the machine with self cleaning function to extend the lifespan of heater elements. Smart auto sensing frequency feature allow the machine to self adjust to the local frequency without the hassle to change any setting.

Features

1. 3 DMX Control Mode
 - a. Fog volume with fan at 100%
 - b. Fog and Fan volume control
 - c. Fog and Fan sync mode
2. Larger tube diameter
3. Built-in air pump with self cleaning function
4. The stability in all details while the maturity reaches perfection
5. Highest fog quality: dry and pure

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : AC-120V, 790 W / AC-230V, 700W
- Initial Heat-Up Time : 5 mins
- Fluid Consumption Rate : 8.5 ml/ min
- Tank Capacity : 2.4 litre
- Control Options : On-Board Control Panel 、
Wireless Remote 、 DMX 、 W-DMX
- Connections : DMX 3+5 pin XLR 、 Neutrik PowerCon
- Weight : 14.1 Kg
- Dimensions (mm) : L 608 x W 275 x H 286
- Liquid Used : Antari FLG Liquid



▪ F-1 Control Panel



▪ F-1 Effect



▪ FLG-5 Heavy Fog Liquid

Redefine Fog Jet Effect
Feel the Power

W-715
Woojet

W-715 Fog Jet

Antari W-715 fog machine provides powerful fog plume effect.

The new heating system provides a remarkable output of 20 seconds burst, increase in heat preservation to reduce re-heat time. Newly designed fluid piping system removes the remaining fluid to provide clear burst without excess fog. FLC water based fluid is specially designed for the job, makes the effect more perfect and precise with a fast-dissipating formula.

2 Second Jet Mode enables quick effect at a touch of button, with advanced LCD control panel, W-1 wireless control system and DMX 512 onboard provides versatile and flexible ways of control.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 100Vac - 1340W , 120Vac - 1400W
220Vac - 1470W , 240Vac - 1600W
- Output : Height 5 Meter , Width 1 Meter
- Initial Heat-up Time : 9 minutes (approx.)
- Fluid Consumption Rate : 300 ml/min (100% output)
- Tank Capacity : 2.4 Liters
- Remote Included : W-1 Wireless Remote
- Weight : 15.5 kg
- Dimensions (mm) : L 449 x W 295 x H 199
- Liquid Used : Antari FLC Water-Based Fluid



• FLC-5 Water Based Fluid



• W-715 Effect



• LCD Control Panel



• W-1 Wireless Transmitter



• W-715 Effect





Z-1520 RGB

Want to add colors to your fog effects?

Not a problem! Let Antari Z-1520 RGB fulfill your dreams. With additional 22 RGB bright LED to shine the fog output produced by Antari Z-1520, the evolutionary successor of well-known Z-1020.

One machine can satisfy desires for both spectacular fog and lighting effects at the same time.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : AC-120V/230V,1550W
- Output : Height 5 Meter , Width 1 Meter
- First Heat-up Time : 5 min
- Tank Capacity : 2.4 liter
- Fluid Consumption Rate : 150 ml/min
- Light Source : 22 x 3W LED (8R, 7G, 7B)
- Remote Included : W-2 Wireless Transmitter
- Weight : 10.4 Kg
- Dimensions (mm) : L 418 x W 295 x H 210
- DMX : On board
- Liquid Used : Antari FLC Water-based Fluid



• 22 x 3W LED
(8R, 7G, 7B)



• W-2 Wireless
Transmitter



• FLC-5 Water Based Fluid




• Red



• Green



• Blue



• RGB





FAZER

F-5D FAZER

F-5D Fazer

Antari is proud to present F-5D to the entertainment industry. F-5D is the new generation of F-3. Compare to its predecessor, there are 5 main improvements on F-5D:

- 1.The haze output is 200% higher than the original F-3 and the haze flow is smootherv.
- 2.Built-in Wireless DMX receiver
3. Larger heater tubing reduces the risk of heater clogging.
- 4.Even quieter than the original F-3. Perfect for venues where silence is golden.
- 5.Multi-languages control interface available. More operation-friendly for users in different areas.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : AC-120V/230V,850W
- Output : 3000 cu.ft / min
- First Heat-up Time : 4 min
- Fluid Consumption : 2 hr / liter (100% Output)
- Tank Capacity : 2.8 liter
- Control : Blue LCD screen , Timer mode , Volume mode
- Weight : 22.9 Kg
- Dimensions (mm) : L 535 x W 465 x H 225
- Wireless DMX Reciver : On Board
- DMX Channel Occupied : 2 Channels (one for fog output ; one for fan output)
- Liquid Used : Antari FLG Liquid




• Control Panel



• F-5D Fazer Effect



• FLG-5 Heavy Fog Liquid



*HIGH PERFORMANCE HAZE .
SURPRISINGLY SMART*

Z³⁵⁰ Series



Z-350 Fazer

Z-350 Fazer , Patent Pending !

The Z-350 is the latest creation from Antari stemming from years of experience in Fazer development.

The adoption of the air pump technology not only enables the Z-350 to generate dry haze but also provides its heater with a self-cleaning function. The Z-350 comes with a larger tube of one diameter, which substantially reduces the risk of heater clogging.

An extremely low fluid consumption rate grants a full tank (1.3 liters) of the Z-350 to produce more than 7 hours of non-stop hazing at maximum output.

The new on-board DMX interface allows users smarter control of the Z-350 : When a DMX signal is received, the machine powers up and starts heating up automatically. When the DMX signal is off, it automatically begins the self-cleaning process and then goes into "Sleep" mode.

The machine weighs only 8.7 kg. Being so light and compact allows the Z-350 to be transported and setup anywhere - whenever needed.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 700W
- Output : 3000 cu.ft/min
- Initial Heat-up Time : 4 min
- Fluid Consumption Rate : 3 ml/min (100 % output)
- Tank Capacity : 1.3 Liters
- Optional Remote : Z-3 Remote
- Weight : 8.7 kg
- Dimensions (mm) : L 320 x W 153 x H 391
- Liquid Used : Antari FLG Liquid



• Z-350 Fazer Effect



• Rear Panel



• Z-350 Rear Panel



• Z-3 Remote (Optional)



• FLG-5 Heavy Fog Liquid



Z³⁵⁰Series®



Not just wireless but Mobile.

WF
WIRELESS FIDELITY



WiFi-800 Fog Machine / Controlled by Smartphone

This is world's 1st SmartPhone controlled fog machine : Antari WiFi800.

Now, besides making phone calls, checking your Facebook, playing Angry Birds, you can also use your SmartPhone to control Antari WiFi800 fogger.

Add this cool function to your stylish Antari 800 Watt fogger today!

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 800 W
- Output : 3,000 cu.ft / min
- First Heat-up Time : 100 seconds
- Tank Capacity : 0.8 liter
- Fluid Consumption Rate : 60 min / 0.8liter (100% Output)
- Machine Control : On/Off Switch , iOS & Android Device
- Weight : 4.1 Kg
- Dimensions (mm) : L 315 x W 128 x H 166
- Liquid Used : Antari FLR / FLG Liquid



WiFi800
WIRELESS FIDELITY



• WiFi800 Effect



• FLR-5 • FLG-5



Available on the
App Store 



ANDROID APP ON
Google play 



The fog you need, anytime, anywhere from Antari.
The world's most reliable fogger.

IP-Rated Fog Machine / IP-1000

This brand-new IP-1000 has been a break through from the past models that are only limited in indoor usage.

1000W fog machine featuring a sleek stainless exterior that renders this powerful fog machine impervious to both dust and water spray. This new IP-65 rated model represents both a technical and aesthetic advancement, melding an appealing fresh form and groundbreaking practical functionality in a new unit suitable for a wide range of club, installation, retail and leisure applications and beyond. Combining the solid performance for which Antari fog machines are known with leading edge enhancements, the IP-1000 spray-proof fog machine is an exciting addition to the Antari line.

Main Features:

1. Stainless steel case makes it perfect for operating in outdoor with damp condition.
2. Typical Antari quality heat exchanger generates pure and dry fog.
3. To give you the flexibility of installation and maximize the duration of continuous operation, IP-1000 does not come with an attached fog fluid tank. With a 10 meter long fog fluid tube coming along with IP-1000, you can deploy your fluid tank at any place where is most convenient for you. You can also use a huge fog fluid tank (not included with the original package) to enable your expected continues operation time.

IP-1000 Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
 U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 1,000 W
- Output : 15,000 cu.ft / min
- First Heat-up Time : 11 min
- Fluid Consumption Rate : 11 min / liter (100% Output)
- Remote Included : IP-10 Remote
- Weight : 8.8 Kg
- Dimensions (mm) : L 355 x W 250 x H 148
- Liquid Used : Antari FLR / FLG Liquid



IPFOG
IP-1000



- **IP-1000 Effect**



- **Rear Panel**



- **IP-10 Remote**
(Cable Length-25ft)



- FLR-5 Light Fog Liquid
- FLG-5 Heavy Fog Liquid



- **Control Panel**



- **IP-1500 Effect**



- **W-1 Wireless Transmitter**



- FLR-5 Light Fog Liquid
- FLG-5 Heavy Fog Liquid

ĐFOG
IP-1500

IP-Rated Fog Machine / IP-1500 📶

The IP-1500 is Antari's newest waterproof fog machine, incorporating an innovative new design that earns it an IP-65 rating. Whether indoor or outside, the new IP-1500 delivers massive fog output with its state-of-the-art design and 1500 watts of power.

Included in that design is an extremely precise temperature control system, highly efficient heat conservation system, and an acutely sensitive liquid detection system that senses when fog output or liquid supply is running low. When using the IP-1500 outdoors, even when raining, it is capable of detecting the ambient temperature and adjusting its operating parameters accordingly. Of course, both DMX and wireless remote options also come standard with this professional machine.

The new IP-1500 was designed with efficiency in mind and achieves 13% less electricity consumption than other foggers in its size class, making it the greenest choice.

IP-1500 Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
- U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 1500 W
- Output : 20,000 cu.ft / min
- First Heat-up Time : 10 min
- Fluid Consumption : 9 min / liter (100% Output)
- Remote Included : W-1 Wireless Transmitter
- Control : Blue LCD screen , Timer mode ,
 Volume mode , Wireless Remote
- Weight : 13.5 Kg
- Dimensions (mm) : L 450 x W 220 x H 180
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid



- **Control Panel**



- **IP-1500 Effect**



- **W-1 Wireless Transmitter**



- FLR-5 Light Fog Liquid
- FLG-5 Heavy Fog Liquid



Artari's W-Series, a Revolutionary Fog and Small Bubble
Machine Series with Integrated Wireless Control Intelligence.

*Easy. simply.in.control.
made.to.be.free.*

W-515D / W-530D Wireless Control Fog Machine

The cutting-edge wireless control system gives Antari W series a simple setting and operation interface. Additionally, the state-of-the-art heater design upgrades the W Series fog machines to a higher level in terms of good quality fog and energy efficiency. In conclusion, Antari W Series bring users to a professional scene in an easier method.

Main Features :

- 1. Intelligent Wireless Control System**
Each machine comes with a set of wireless receiver and transmitter as standard controller. The working distance of wireless control is 50 meters in open area.
- 2. Opto-electronic Fluid Sensor**
When the fluid recipient runs dry, the fluid sensor stops pumping automatically to protect pump from burning.
- 3. More Efficient New Heat Exchanger Design**
It can generate drier fog with smaller particles. This leads to a fairly low fog fluid consumption. Compare to the equivalent power consumption heat exchangers, the same quantity of fog fluid in W series can produce 20% more fog than others.
- 4. New Advanced PCB (Printed Circuit Board)**
Design The new system can control temperature precisely and rule out the influence from outside environments as much as possible to make W series fog machines be able to work stably between - 20 and + 60 degree Celsius.

W-515D Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 1,500 W
- Output : 20,000 cu.ft / min
- First Heat-up Time : 10 min
- Tank Capacity : 6 liter
- Fluid Consumption Rate : 8.3 min / liter
(100% Output)
- Remote Included : W-1 Wireless Remote
- Optional Accessories : FX-5 Flightcase,
W-515-HB Hanging Bracket
- Weight : 14 Kg
- Dimensions (mm) : L 561 x W 278 x H 186
- DMX : On board
- WDMX : On board
- Liquid Used : Antari FLR / FLG Liquid

W-530D Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 3,000 W
- Output : 40,000 cu.ft / min
- First Heat-up Time : 12 min
- Tank Capacity : 6 liter
- Fluid Consumption Rate : 5.3 min / liter
(100% Output)
- Remote Included : W-1 Wireless Remote
- Optional Accessories : FX-5 Flightcase,
W-515-HB Hanging Bracket
- Weight : 19 Kg
- Dimensions (mm) : L 581 x W 278 x H 186
- DMX : On board
- WDMX : On board
- Liquid Used : Antari FLR / FLG Liquid



• Control Panel (LCD Screen)



• Neutrik PowerCON



• W-515D Effect



• W-530D Effect



• FLR-5 Light Fog Liquid
• FLG-5 Heavy Fog Liquid



W-508 / W-510 Wireless Control Fog Machine

The cutting-edge wireless control system gives Antari W series a simple setting and operation interface. Additionally, the state-of-the-art heater design upgrades the W Series fog machines to a higher level in terms of good quality fog and energy efficiency. In conclusion, Antari W Series bring users to a professional scene in an easier method.

W-510 Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 1,000 W
- Output : 15,000 cu.ft / min
- First Heat-up Time : 13.5 min
- Tank Capacity : 2.8 liter
- Fluid Consumption Rate : 11 min / liter (100% Output)
- Remote Included : W-1 Wireless Remote
- Optional Accessories : W-510-HB Hanging Bracket
- Weight : 11.4 Kg
- Dimensions (mm) : L 468 x W 250 x H 148
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid

W-508 Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 800 W
- Output : 3,000 cu.ft / min
- First Heat-up Time : 100 seconds
- Tank Capacity : 0.8 liter
- Fluid Consumption Rate : 60 min / 0.8liter (100% Output)
- Remote Included : W-1 Wireless Remote
- Weight : 3.8 Kg
- Dimensions (mm) : L 315 x W 128 x H 166
- Liquid Used : Antari FLR / FLG Liquid



• W-508 Rear Panel



• W-508 Effect



• W-510 Rear Panel



• W-510 Effect



• FLR-5 Light Fog Liquid
• FLG-5 Heavy Fog Liquid



W-101 Wireless Control Bubble Machine


The cutting-edge wireless control system gives Antari W-101 bubble machine a simple setting and operation interface. It brings users to a professional scene in an easier method.

Main Features:

1. **Intelligent Wireless Control System**
Each W-101 bubble machine comes with a set of wireless receiver and transmitter as standard controller. The working distance of wireless control is 50 meters in open area.
2. **Texture-like Painting Finish**
Though most of the time, bubble machines are served as supportive character at the corner of stage, W-101 bubble machine is now given extraordinary elegant finish as a star!

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 25 W
- Tank Capacity : 1 liter
- Fluid Consumption Rate : 2 hr / liter
- Remote Included : W-1 Wireless Remote
- Weight : 4.8 Kg
- Dimensions (mm) : L 340 x W 170 x H 172
- Liquid Used : Antari BL-5 Bubble Liquid



▪ W-101 Effect



▪ Rear Panel



▪ W-101 Bubble Machine



▪ BL-5 Bubble Liquid





The M-Series / Stage Fog Machine M-8

M-8 is the new member of Antari M Series. It is also the first 1800 Watt fog machine from Antari.

Besides the heritage of tough structure and built-in DMX from Antari M Series, the most marvelous feature is the speedy and massive fog output provided by the high pressure heat exchanger, which can satisfy rigorous demands of professional stage and touring use.

Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
 U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 1,800 W
- Output : 50,000 cu.ft / min
- First Heat-up Time : 9 min
- Tank Capacity : 10 liter
- Fluid Consumption Rate : 4 min / liter (100% Output)
- Remote Included : M-21 Control Module
- Optional Remotes : M-31 Wireless Control Module
- Optional Accessories : FX-5 Flight case , M-5-HB Hanging Bracket
- Weight : 23.2 Kg
- Dimensions (mm) : L 668 x W 319 x H 170
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid



- **M-8 Effect**



- **M-21 Control Module**



- **M-31 Wireless Control Module**



- FLR-5 Light Fog Liquid
- FLG-5 Heavy Fog Liquid

The M-Series / Stage Fog Machine M-5 & M-10

This high performance heavy-duty M-5 & M-10 Stage Fog Machine from Antari are uniquely designed to meet the rigorous demands of stage and touring use: a high-capacity 10 liter tank offers long time operation. A rectangular, durable sleek housing design makes the Antari M-Series Stage Fog Machine easy to carry and be able to stand with tough road transport (Anti-shock) where custom flightcases come optional for your application.

Due to its enhanced heat reservation structure, it reduces electricity consumption for about 20 ~ 25% yet producing more powerful fog. They will stand the rigors of professional use as well as protection against unexpected water spills and changing weather conditions.

There are 2 professional choices M-5 (1500W) and M-10 (3000W). They have DMX on-board and can be controlled remotely with a digital M-20 LCD display module, enabling convenient remote operation. DMX connection can be worked by either 3 or 5 pin connector.

The Antari M-Series Stage Fogger are ideal for large concerts, movie production, fire training purpose and especially for touring applications, as well as any venue where ultimate performance, ease of use and dependability are specified. It is the most powerful single heater-block fog machine available on the market.

M-5 Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 1,500 W
- Output : 25,000 cu.ft / min
- First Heat-up Time : 8 min
- Tank Capacity : 10 liter
- Fluid Consumption Rate : 6 min / liter (100% Output)
- Remote Included : M-20 Control Module
- Optional Remotes : M-30PRO Wireless Control Module
- Optional Accessories : FX-5 Flight Case , M-5-HB Hanging Bracket
- Weight : 15 Kg
- Dimensions (mm) : L 668 x W 319 x H 170
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid

M-10 Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
U.K. version : 240 Volt Japan version : 100 Volt
- Heater : 3,000 W
- Output : 50,000 cu.ft / min
- First Heat-up Time : 13 min
- Tank Capacity : 10 liter
- Fluid Consumption Rate : 4 min / liter (100% Output)
- Remote Included : M-20 Control Module
- Optional Remotes : M-30PRO Wireless Control Module
- Optional Accessories : FX-5 Flight Case
- Weight : 21 Kg
- Dimensions (mm) : L 690 x W 319 x H 192
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid

M-10 STAGE FOGGER



M-5 STAGE FOGGER



• M-5 Effect



• M-10 Effect



• M-20 Control Module



• M-30PRO Wireless Control Module



• FLR-5 Light Fog Liquid
• FLG-5 Heavy Fog Liquid



Z4 Series II
Real Fog

Mobility and Portability Fog Machine Z-800II

Z-800II, a cutting-edge technology designed by Antari is aimed to meet the demands of mobility and portability. An ideal machine for easy operation that is perfect for smaller venues and DJs.

The Z-800II, whether controlled via wireless, timer or in stand-alone mode, features rock-steady continuous output. Z-800II can undertake a fast warm-up time less than 100 seconds and produces a steady, constant fog as long as you need without any reheating time in between.

This machine encompasses all technical aspects with per excellence performance and workmanship design. With its high efficient power control system, it now allows the fogger to operate at low-level temperature resulting in 20% less electricity than its previous model.

Z-800II sets the standard in mobility/portability fog machine range presented by Antari. Apparently a user-friendly device and a remarkable fog machine perfect for clubs, discotheques and small venues.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 800 W
- Output : 3,000 cu.ft / min
- First Heat-up Time : 100 Sec
- Tank Capacity : 0.8 liter
- Fluid Consumption Rate : 60 min / 0.8 liter (100% Output)
- Remote Included : Z-10 ON/OFF (Toggle Switch)
- Optional Remotes : Z-40 Timer Remote , Z-50 Wireless Remote
- Weight : 3.5 Kg
- Dimensions (mm) : L 315 x W 128 x H 165.5
- Liquid Used : Antari FLR / FLG Liquid



• Rear Panel



• Manual ON / OFF Button



• Z-800II Effect



• Z-10 Remote



• FLR-5 Light Fog Liquid
• FLG-5 Heavy Fog Liquid

Z-1020 Two-Way Fog Machine

Z-1020, the most powerful DMX-controlled vertical pure fog machine which stands differently from the other Z-Series. Its design is for special purposes and applications which you can't find in any fog machines available. It uses mirror-piping heater technology that supports advance features and high-throughout burst mode with its extreme low energy consumption.

The Z-1020 can be positioned on the ground to fog upward to have a column of fog effect or can be mounted on the wall to easily blend the surroundings with atmospheric effect. Or else can be used to fog in upright position by carrying the handle like ordinary fog machine. Other features include DMX on-board, built-in electronic low fluid detector. Light weight, sleek and compact design, easy installation and maintenance.

Z-1020 is perfect for theatrical and studio application, large halls, concerts, DJ touring and clubs. Custom flight cases are also an optional choice for 2 units of Z-1020.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 1,000 W
- Output : 16,000 cu.ft / min
- First Heat-up Time : 11 min
- Tank Capacity : 2.4 liter
- Fluid Consumption Rate : 11 min / liter
(100% Output)
- Remote Included : Z-10 ON/OFF (Toggle Switch)
- Optional Remotes : Z-40 Timer Remote , Z-50 Wireless Remote
- Weight : 9.8 Kg
- Dimensions (mm) : L 370 x W 295 x H 135
- DMX : On board
- Liquid Used : Antari FLC Water-based Fluid



• Control Panel



• Z-1020 Effect
Horizontal Output



• Z-1020 Effect
Vertical Output



• Z-10 Remote



• FLC-5 Water Based
Fluid

Z-1000II & Z-1200II Fog Machine

Z-1000II and Z-1200II dominate the entry-level of Z-Series II Fog Machine for high performance output necessary to scale up the machines' efficiency. It is equipped with ECO thermal control system and patented UNICORE heater technology where the heater core can be easily draw-out from the heater block ensuring quick and easy cleaning.

The heater element is like a jet air stream that can deliver a powerful fog in order to create the very best atmospheric effect. (perfect for mid-air smoke as well) In addition, it is armed with on-board DMX to work with club lighting directors, installers, planners as well as DJ's who need more fog and control.

Z-1000II and Z-1200II come with high-quality pump and electronic low-fluid detector also known as Thermal Cut-Off (TCO), which automatically reactivates and shuts down the pump power when the fluid level is low and depleted. Other features include standard hanging bracket to facilitate in any installations or on the road from venue to venue.

Z-1000II Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 1,000 W
- Output : 12,000 cu.ft / min
- First Heat-up Time : 5.5 min
- Tank Capacity : 1.7 liter
- Fluid Consumption Rate : 18 min / liter (100% Output)
- Remote Included : Z-10 ON/OFF (Toggle Switch)
- Optional Remotes : Z-40 Timer Remote , Z-50 Wireless Remote
- Accessory Include : Hanging Bracket
- Weight : 6.6 Kg
- Dimensions (mm) : L 433 x W 198 x H 151
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid

Z-1200II Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 1,200 W
- Output : 18,000 cu.ft / min
- First Heat-up Time : 9 min
- Tank Capacity : 2.5 liter
- Fluid Consumption Rate : 15 min / liter (100% Output)
- Remote Included : Z-8 Timer Remote
- Optional Remotes : Z-9 Wireless Remote
- Accessory Include : Hanging Bracket
- Weight : 10.9 Kg
- Dimensions (mm) : L 458 x W 243 x H 177
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid



▪ Z-1000II Effect



▪ Z-10 Remote



▪ Z-1200II Effect



▪ Z-8 Timer Remote



▪ FLR-5 Light Fog Liquid
▪ FLG-5 Heavy Fog Liquid

Z-Series II
Ideal Fog

Make Your Event Dynamic / Z-1500II Fog Machine

Antari proposes to you the Z-1500II, the rigorous research and development resulting stability, durability, and reliability. When it comes to ultimate performance and precision control, the Z-1500II will suit virtually any applications.

These fog machine provide significant advantages in a wide array of applications where volume of fog output is critical. Around 25% electricity is saved due to high efficient power control system allowing the fogger to operate at low-level temperature.

An electronic low fluid detector is also installed which automatically weakens pump power and stops pumping when running-out of fluid. They are fully controllable via Z-20 LCD control module supplied allowing the operator to set the volume control and timing precisely to the exact percentage from 1% to 100% output. DMX connection can be worked by either 3 or 5 pin connector.

These machines are Antari's proud innovation; they are dedicated to most demanding professionals. Ideal for very large venues, outdoor event, movie production or for fire training concept.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 1,500 W
- Output : 20,000 cu.ft / min
- First Heat-up Time : 8.5 min
- Tank Capacity : 6 liter
- Fluid Consumption Rate : 9 min / liter (100% Output)
- Remote Included : Z-20 Control Module
- Optional Remotes : Z-30PRO Wireless Control Module
- Weight : 14 Kg
- Dimensions (mm) : L 688 x W 285 x H 188
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid



• Z-1500II Effect



• Z-20 Control Module



• Z-30PRO Wireless Control Module (Optional)



• FLR-5 Light Fog Liquid
• FLG-5 Heavy Fog Liquid

Z-1500 Series II
Ideal Fog

Make Your Event Dynamic / Z-3000II Fog Machine

Antari proposes to you the Z-3000II, the rigorous research and development resulting stability, durability, and reliability. When it comes to ultimate performance and precision control, the Z-3000II will suit virtually any applications. These fog machine provide significant advantages in a wide array of applications where volume of fog output is critical. Around 25% electricity is saved due to high efficient power control system allowing the fogger to operate at low-level temperature.

An electronic low fluid detector is also installed which automatically weakens pump power and stops pumping when running-out of fluid. They are fully controllable via Z-20 LCD control module supplied allowing the operator to set the volume control and timing precisely to the exact percentage from 1% to 100% output. DMX connection can be worked by either 3 or 5 pin connector.

These machines are Antari's proud innovation; they are dedicated to most demanding professionals. Ideal for very large venues, outdoor event, movie production or for fire training concept.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 3,000 W
- Output : 40,000 cu.ft / min
- First Heat-up Time : 12 min
- Tank Capacity : 6 liter
- Fluid Consumption Rate : 5 min / liter (100% Output)
- Remote Included : Z-20 Control Module
- Optional Remotes : Z-30PRO Wireless Control Module
- Weight : 19.9 Kg
- Dimensions (mm) : L 735 x W 310 x H 192
- DMX : On board
- Liquid Used : Antari FLR / FLG Liquid



▪ Z-3000II Effect



▪ Z-20 Control Module



▪ Z-30PRO Wireless Control Module (Optional)



▪ FLR-5 Light Fog Liquid
▪ FLG-5 Heavy Fog Liquid

Z Series II
Ideal Fog



Effects Machine

M-1 MOBILE FOGGER

When you need a touch of fog



M-1 Mobile Fog Machine

The M-1 Mobile Fog Machine is developed especially for photographers to use on location and have found work in theatrical and cinematic applications.

This Mobile fogger is perfect for situations where a touch of fog is required in remote or unexpected places. Because of its dimensions and weight (about 2 kg) this mobile fogger can be discretely placed on props, inside sets, or held on hand. As implied by its name, the mobile fogger's main characteristic is its mobility. The unit operates on a compact 12V DC rechargeable battery and is very easy to carry and operate without any warming-up time.

Or else, the M-1 can also operate with corded dummy battery. To increase the machine's versatility, timer and wireless remotes are available as optional.

M-1 Specification

- Output : 300 cu.ft / min
- Power Consumption : 75 W
- Tank Capacity : 110 c.c.
- Battery : DC 12V / 2.3Ah
- Consumption : 2 c.c. / min
- Optional Remotes : MCT-1 Timer Remote , MCR-1 Wireless Remote
- Optional Accessories : DCP-12 Power Adaptor / Dummy Battery
- Weight : 6 Kg , Whole M-1 Kit
- Dimensions (mm) : L 227 x W 66 x H 81
- Liquid Used : Antari FLM-05 / M-1 Fog Liquid

MCR-1 Wireless Remote (Optional)

- Working Distance : Wireless, up to 50 M
- Connector : 4 Pin S Terminal
- Function : Wireless ON/OFF



■ M-1 kit

M-1 kit includes a M-1 fog machine, a case, a rechargeable battery, a charger, and a bottle of 500c.c. FLM-05 M-1 fog liquid.



■ M-1 Effect



■ Battery & Charger



■ DCP-12 Power Adaptor / Dummy Battery (Optional)



■ FLM-05 / M-1 Fog Liquid


LCU-1 Liquid Control Unit

The LCU-1 Liquid Control Unit is the ultimate club system for club installations. The system features a separate, ground-based liquid supply that can be stored wherever is most convenient for the operator. This means no more climbing ladders to fill the empty liquid containers night after night. Fog liquid can be automatically pumped right out of Antari fog liquid containers if desired. Setup is as simple as making the connections from the LCU-1 to the machines as shown in the diagram. The casing of the machines are designed to fit easily into conventional trussing. With DMX on-board, the machines and the LCU-1 can all be set to the same channel for straightforward operation.

In addition, a separate DMX address is given which provides greater control over the effect produced and in this setup, please make sure that each of the machine channels are paired with the LCU-1's DMX channel. This way, if the first Z-1200II is activated, the LCU-1 will pump liquid to that machine, when the 2nd Z-1200II is activated, the LCU-1 will pump again and so on. Hence, LCU-1 will not pump liquid unless the LCU-1's DMX channel is selected and it has satisfied user's requirement of full control on its performance. LCU-1 has given club operators what they need: complete control and ease of use. And no more ladders to climb!

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Remote Included : depends on machine used
- Optional Remotes : Z-8 Timer Remote
- Weight : 2.7 Kg
- Dimensions (mm) : L 215 x W 193 x H 105
- Compatible With : Z-1200II, ICE-101, S-100II, S-200
- Function : DMX On-board

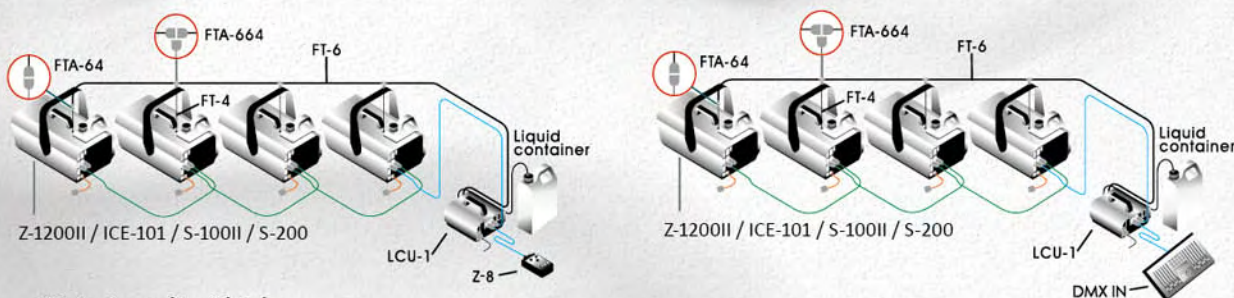

- FT-4 : 4mm liquid tube
- FT-6 : 6mm liquid tube
- FTA-64 : Adaptor for 4mm to 6mm tube connection
- FTA-664 : T-type adapter for two 6mm tubes to one 4mm tube connection

S-120 Foam Machine

Antari S-120 foam machine is reliable, environmentally and user-friendly. It produces clear and bubbly foam suitable for a wide variety of applications. S-120 can be easily operated by a beginner who is not a pro user in machines. Also its output is continuously regulated when using Antari dealer recommended SL-5 liquid. The foam produced is safe, clean and odorless.

In fact, Antari has designed this foam machine with a smaller size that is suitable for small stage effects and parties. As an increasing numbers of people who prefer to celebrate their parties at home, a small portable and easy-to-operate machine would always be an amusing supporting cast to include.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 600 W
- Output : 320ml / min
- Tank Capacity : 5 liters
- Weight : 12 Kg
- Dimensions (mm) : L 600 x W 260 x H 300
- Function : On/Off Only
- Liquid Used : Antari SL-5 Snow / Foam Liquid



• S-120 Effect



• Rear Panel



• SL-5 Snow / Foam Liquid



Antari's Haze machines produce safe, clean and virtually invisible haze, which enhances the beams from projected lighting equipment.



HZ-100 Haze Machine

This durable, compact size HZ-100 conveniently lends itself to stage, concert and movie work where ease of operation is desired.

The HZ-100 comes equipped with an efficient, maintenance-free air compressor where no warming time required before operation; just turn on and you will have the beautiful optical translucent haze without hassle.

On the other hand, you can simply attach the optional HC-1 Timer Controller to the HZ-100 and adjusts the timer's interval and duration settings at ease.

Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
U.K. version : 240 Volt Japan version : 100 Volt
- Output : 1,000 cu.ft / min
- Tank Capacity : 2.5 liter
- Fluid Consumption Rate : 25 hr / liter
- Optional Remotes : HC-1 Timer Remote , HCR-1 Wireless Remote
- Air Pressure : 30 psi
- Weight : 12 Kg
- Dimensions (mm) : L 484 x W 250 x H 236
- DMX : None
- Liquid Used : Antari HZL-1 Haze Liquid



• HC-1 Timer Remote (Optional)



• HCR-1 Wireless Remote (Optional)



• HZ-100 Effect



• HZL-1 Haze Liquid

HZ-350 Haze Machine

HZ-350, a brand new haze machine from Antari with not only the reliable quality as a tradition but also new charming features!

With the innovative LCD control panel built in the machine, now you can master this classic haze machine without effort at all. The digital LCD control system now allows users to set the timer and DMX address directly and accurately by just moving their fingertips.

Furthermore, wireless on/off control is another excitement for users who need to execute the output timing with their own hands.

Now just try it to believe it!

Specification

- Voltage : U.S. version : 120 Volt Europe version : 230 Volt
U.K. version : 240 Volt Japan version : 100 Volt
- Output : 2,000 cu.ft / min
- Tank Capacity : 2.5 liter
- Fluid Consumption Rate : 21 hr / liter
- Remote Included : W-1 Wireless Transmitter
- Optional Remotes : HC-1 Timer Remote
- Air Pressure : 30 psi
- Weight : 14.2 Kg
- Dimensions (mm) : L 491.8 x W 273 x H 314.5
- DMX : On board
- Liquid Used : Antari HZL-1 Haze Liquid



• Control Panel



• W-1 Wireless Transmitter



• HC-1 Timer Remote (Optional)



• HZL-1 Haze Liquid



• HZ-350 Effect

HZ-400 Professional Haze Machine

The HZ-400 is equipped with an internal, maintenance-free air compressor, a sophisticated haze transfer mechanism, and a specially designed liquid tank. The HZ-400 is equipped with two haze nozzles capable of producing virtually invisible large volume of haze output. The fine translucence and non-stop output produced by HZ-400 makes more remarkable by the fact that with this hazer there are no temperature controls, hot air and warm-up times during operation. Its internal compressor is extremely powerful, quiet and very efficient. With an added on-board DMX which provides users to control the unit by any DMX 512.

HZ-400 Professional Haze machine is the elegant combination between the ultimate haze quality from high capacity, low fluid consumption and silent operation demanded by professionals.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Output : 2,800 cu.ft / min
- Tank Capacity : 2.5 liter
- Fluid Consumption Rate : 16 hr / liter
- Remote Included : HC-1 Timer Remote
- Optional Remote : HCR-1 Wireless Remote
- Air Pressure : 100 psi
- Weight : 18.5 Kg
- Dimensions (mm) : L 500 x W 320 x H 246
- DMX : On board
- Liquid Used : Antari HZL-1 Haze Liquid



• HZ-400 Rear Panel



• HC-1 Timer Remote



• HCR-1 Wireless Remote (Optional)



• HZL-1 Haze Liquid



• HZ-400 Effect

HZ-500 Haze Machine

Antari is proud to unveil the innovative Hazer with passion, HZ-500, to entertainment industry. This groundbreaking masterpiece created by Antari R&D team is invested with enormous experience in studying and designing haze machines after years of hard work.

Therefore, the performance of HZ-500 is second to none and better than any other hazers on stage. It can work perfectly with laser beam, lighting and bring the best atmospheric effects to all events.

HZ-500 is definitely the best choice for those stage designers, performers, and audiences who are sensitive to surrounding settings. Last but not the least, the extraordinary low haze liquid consumption rate makes HZ-500 more energy-efficient and more environmental-friendly, silent operation demanded by professionals.

Specification

- Voltage :
U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Output : 3,000 cu.ft. / min
- Tank Capacity : 2.5 liter
- Fluid Consumption Rate : 15 hr / liter
- Control : LCD screen , Timer mode
- Compact Flight Case Included
- Air Pressure : 100 psi
- Weight : 31.5 Kg
- Dimension (mm) : L 490 x W 351 x H 338
- DMX : On board
- Liquid Used : Antari HZL-1 Haze Liquid



• Included black cork for fluid tank



• Fluid Level Indicator



• HZ-500 Control Panel



• HZL-1 Haze Liquid

A serene winter scene featuring a dense forest of tall, slender trees. The ground is covered in a thick layer of snow, and numerous snowflakes are captured mid-fall, creating a soft, hazy atmosphere. A rustic wooden fence runs along the right side of the frame. The overall color palette is dominated by cool blues and whites, with the dark trunks of the trees providing contrast.

*Listen closely and you might hear the snow fall,
but you won't hear the Antari Snow Machine.*

S SNOW MACHINE
SNOW WIRELESS

S-100X & S-200X Snow Machine

With newly-developed PCB and new advanced pump, S-100X and S-200X can be even more reliable and generate 50% more snow outputs than their predecessors, S-100II and S-200.

They can create both romantic snow and astonishing blizzard effects.

The only difference between S-100X and S-200X is that S-200X is "Silent" version snow machine. Its working noise level is much lower, which is great for environments where quiet condition is required.

S-100X Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 900 W (Min Output) ,
1150 W (Max Output)
- Output : 200 ml / min
- Tank Capacity : 5 liter
- Accessory Include : Hanging Bracket
- Remote Included : SC-2 Volume Remote
- Weight : 11 Kg
- Dimensions (mm) : L 505 x W 276 x H 280
- DMX : On board
- Liquid Used : Antari SL-5 Snow / Foam Liquid
Antari SL-5A Snow Liquid Premium

S-200X Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 900 W (Min Output) ,
1150 W (Max Output)
- Output : 200 ml / min
- Tank Capacity : 5 liter
- Accessory Include : Hanging Bracket
- Remote Included : SC-2 Volume Remote
- Weight : 11.5 Kg
- Dimensions (mm) : L 505 x W 276 x H 280
- DMX : On board
- Liquid Used : Antari SL-5 Snow / Foam Liquid
Antari SL-5A Snow Liquid Premium



• S-100X Effect



• S-200X Effect



• S-200X on Stage Truss



• SC-2 Remote



• SL-5 • SL-5A

SILENT SNOW MACHINE
S-200X

SW-250 Wireless Control

High Output Snow Machine

Are you looking for snow machine with wireless control? Are you looking for snow machine which can generate higher volume of snow output? If you need either or both of above features for snow machine, then Antari SW-250 is your best solution.

SW-250 is not only a completely digitalized snow machine with on-board DMX and wireless control, but also can create a real blizzard effect. Compare to its predecessors, S-100II & S-200, its snow output is increased about 250% at maximum.

In addition, timer and volume (1~100% output) control functions allow you to control the snowflakes effect even more accurately.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 600 W (Min Output) ,
1290 W (Max Output)
- Output : 250 ml / min
- Tank Capacity : 5 liter
- Remote Included : W-1 Wireless Transmitter
- Accessory Include : Hanging Bracket
- Optional Remotes : SC-2 Volume Remote
- Weight : 12.6 Kg
- Dimensions (mm) : L 554 x W 276 x H 228
- DMX : On board
- Liquid Used : Antari SL-5 Snow / Foam Liquid
Antari SL-5A Snow Liquid Premium



• Control Panel



• W-1 Wireless Transmitter



• SC-2 Remote (Optional)



• SL-5 Snow / Foam Liquid
• SL-5A Snow Liquid Premium



SNOW WIRELESS
SW-250



BUBBLE MACHINE

*HIGH OUTPUT BUBBLE MACHINE
BRINGS YOU FUN ALL THE TIME!*

B-100 / B-100X Bubble Machine

This handy party gizmo is equipped with the "Double Bubble Wheel" designed to produce a solid, plentiful amount of bubbles continuously.

The B-100's mouth directs a high output of bubbles up into the air while simultaneously recycling liquid and eliminating dripping. Easy refills and the included hanging bracket makes the B-100 very user-friendly. Without doubt, the B-100 is sure to make any celebration a memorable one.

Note: the B-100X contains a control board allowing the bubble machine to use the wireless and timer remote controls. The B-100, without this board, cannot use these remote controls. The two versions are identical in all other aspects.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 25 W
- Tank Capacity : 1 liter
- Fluid Consumption Rate : 2 hr / liter
- Optional Remotes for B-100X Only : Z-10 ON/OFF Remote ,
BCT-1 Timer Remote ,
BCR-1 Wireless Remote
- Weight : 4.2 Kg
- Dimensions (mm) : L 340 x W 170 x H 172
- Liquid Used : Antari BL-5 Bubble Liquid



• Z-10 Remote (Optional)



• BCT-1 Timer Remote (Optional)



• BCR-1 Wireless Remote (Optional)



• BL-5 Bubble Liquid



• B-100 Effect

B-200 High Output Bubble Machine

To say the B-200 is a high output bubble machine is too modest. It features four "Double Bubble Wheels" which generate a massive, continuous torrent of bubbles.

The set of 3 fans at the back of the unit spread the bubbles far and wide. Designed with lighting designers, large clubs and theatrical productions in mind, this bubble machine has DMX onboard. This provides for central control on B-200's bubble generation. The machine can also operate with / without optional timer and wireless remote controls.

With its large fluid reservoir, the B-200 will pack the venue with bubbles as long as the party lasts!

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : 100 W
- Tank Capacity : 2 liter
- Fluid Consumption Rate : 20 min / liter
- Optional Remotes : BCR-1 Wireless Remote, BCT-1 Timer Remote
- Weight : 11 Kg
- Dimensions (mm) : L 421 x W 250 x H 212.5
- DMX : On board
- Liquid Used : Antari BL-5 Bubble Liquid



• BCT-1 Timer Remote (Optional)



• BCR-1 Wireless Remote (Optional)



• BL-5 Bubble Liquid



• B-200 Effect



LOW FOG GENERATOR

"Monte Roraima" in Venezuela

ICE-101 ICE Fog Machine

ICE-101 Ice fog machine, as its name suggests, produces beautiful floor-hugging dry ice fog effect by simply adding regular ice cubes. Without the inconvenience of dry ice or the potential health hazards caused by dry ice's heavily CO₂ smoke, this ICE Fog machine is expected to be environmentally friendly. A high power 1000W fog machine inside creates amounts of fog which is chilled to create a low lying ground hugging fog effect.

10kg of ice cubes placed in the ice chamber can be stored up to 8 hours & up to 1 hour of continuous operation. Full DMX on-board means 100% control and the drainage pump can be activated manually or set to automatic for optimum convenience. You will never want to go back to dry ice machine again because this unit is very easy & safe to operate as it is the most convenient way to create ankle-deep fog for many applications.

Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Heater : 1,000 W
- Output : 40m² / min
- First Heat-up Time : 4.5 min
- Tank Capacity : 2.5 liter
- Fluid Consumption Rate : 40 min / liter
- Remote Included : Z-8 Timer Remote
- Weight : 24.4 Kg
- Dimensions (mm) : L 660 x W 355 x H 359
- DMX : On board
- Liquid Used : Antari FLR-5 Liquid / FLC Water-Based Fluid



* Note: For best low fog effect, use Antari FLR fog liquid Only.



• ICE-101 Rear Panel




• ICE-101 Ice Chamber with Ice Cubes



• FLR-5 Light Fog Liquid



• FLC-5 Water Based Fluid



• ICE-101 Effect

DNG-100 Fog Cooler

The DNG-100 converts normal fog from any fog machine (suggested models below) into a floor-hugging cloud of dense, white fog that's almost virtually similar to the dry ice effect. This is achieved by cooling the temperature of the fog to the point where it falls to the ground.

The DNG-100 is easy to operate as there are no external controls on the machine. Simply plug the unit IN and place the fog conducting hose from the output of any fog machine to the input of the DNG-100. The unit is fully operational upon being plugged IN. Note that the volume of fog produced is controlled by the fog machine that the DNG-100 is attached to.


Specification

- | | | |
|--|---|--|
| - Voltage : U.S. version : 120 Volt
U.K. version : 240 Volt
Japan version : 100 Volt | - Europe version : 230 Volt
Japan version : 100 Volt | - Weight : 72 Kg |
| - Power Consumption (Compressor) : 750 W | - 600 W | - Dimensions (mm) : L 750 x W 607 x H 347 |
| - Refrigerant : R-404A, 1.46LB | - R-404A, 1.46LB | - Suggested Models : X-515PRO, Z-1200II, Z-1500II, Z-3000II, M-5, M-10, W-515, W-530 |
| - Rated Current : 6.7A | - 3.2A | |
| - Start Current : 61A | - 21 A | |
| - Accessories Included : FT-10, FTA-10, FTA-11, FTA-12 | | - Liquid Used : Antari FLR-5 Liquid |
| - Optional Accessories : FTA-1/2A/3 | | |



Two implementations of the DNG-100 :

* Note: For best low fog effect, use Antari FLR fog liquid Only.



1.A fog conducting hose (FT-10) is attached to a fog machine's output nozzle via an adapter (FTA-1/2A/3) and then connected to the FTA-10 adapter attached to the DNG-100's intake. The fog flows efficiently from the fog machine through the DNG-100, and is directed downwards by the guide plate (FTA-12).



2.For strategic placement of low-lying fog, substitute the guide plate with a fog conducting hose that attaches to the front of the DNG-100 via an adapter (FTA-11). This configuration allows the DNG-100's output to be guided to a desired area without being affected by air currents generated by movement, wind, fans or air conditioners.

DNG-200 LOW FOG GENERATOR




* Note: For best low fog effect, use Antari FLC fog liquid Only.

DNG-200 Low Fog Generator

The DNG-200 Low Fog Generator is the complete ground fog effect solution from a fully self-compacted unit with wheels and handles to stand against tough transport. With today's rising demand & awareness for environmental and health concern, the effects produced is virtually indistinguishable from that is created by dry ice. Distinctively from other products currently on the market, it creates low fog straight from machine's nozzle. This makes it far more efficient and convenient without any hassles of CO₂ installations and other attachments. It is operator-friendly as there are no external controls to the machine. Simply plug the unit and place the 3M fog conducting hose (for remote dispersion) and operate it like a normal fog machine.

Main Features:

1. No CO₂ is used. It's completely safe to human health and environment-friendly.
2. Powerful compressor offers continuous low fog output.
3. Efficient heat exchanger gives Antari DNG-200 capability to generate massive output and makes it the best of the category.
4. Strong wheels and optional flight case allow the unit to be moved with ease and ideal for tours.
5. Compare to the other similar low fog machines (using refrigerator, no CO₂, not dry ice), the low fog produced by Antari DNG-200 is relatively drier.

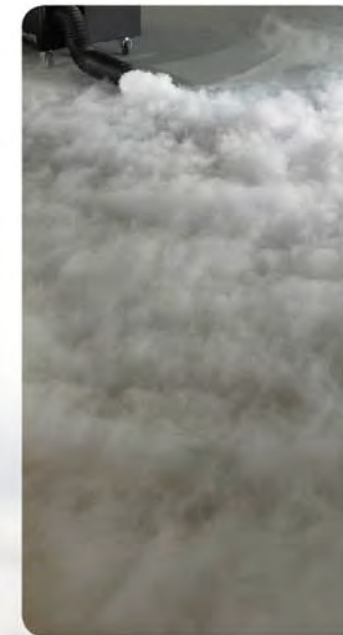

Specification

- Voltage :	U.S. version : 120 Volt	Europe version : 230 Volt
	U.K. version : 240 Volt	Japan version : 100 Volt
- Refrigerant :	R-404A, 1.98LB	R-404A, 1.98LB
- Rated Current :	6.23~14A	2.53~6.26A
- Start Current :	48A	21A
- Heater :	1400W	2500W
- Output :	80m ² / min	80m ² / min
- First Heat-Up Time :	24 min	12 min
- Tank Capacity :	10 liter	10 liter
- Fluid Consumption Rate :	11 min / liter (High output)	
- Remote Included :	D-20 Control Module	
- Accessory Included :	3M Fog Conducting Hose	
- Optional Accessory :	FDNG-200 Flight Case	
- Weight :	120 Kg	
- Dimensions (mm) :	L 780 x W 608 x H 715	
- DMX :	On board	
- Liquid Used :	Antari FLC Water-Based Fluid	
- Additional information :	Self Contained Unit - No CO ₂ / Dry Ice Required	
	Floor-Mount installations (4 wheels)	



• FDNG-200 Flightcase (Optional)



• FDNG-200 Flightcase (Optional)



• D-20 Control Module



• DNG-200 Effect



• FLC-5 Water Based Fluid



The Wind
At Your Fingertips

AF ANTARI FAN
SERIES
EFFECTS FAN

AF-5 / AF-5R Special Effects Fan

AF-5, Antari's very first special effects fan. 3 sections fan speeds can fulfill different wind effects requests. It also can work with fog, haze, snow, bubble machines to bring special effects to higher and farther places. Furthermore, on-board DMX control gives the fan extra intelligence.

AF-5 Specification

- Voltage : U.S. version : 120 Volt , Europe version : 230 Volt , U.K. version : 240 Volt , Japan version : 100 Volt
- Horsepower : 1 HP
- Dimension (mm) : L 558 x W 465 x H 578
- Dimension of Vent (mm) : 454 x 153
- Weight : 17.5 Kg
- Material of Housing : Plastic (Polypropylene)
- 3 sections fan speed
- Optional Remotes : W-1 Wireless Transmitter
- Optional Accessory : AF-5-HB Hanging Bracket
- DMX : On board
- Adjustable Wind Angle : Horizontal, 45 degree, Vertical

AF-5R Specification

- Wireless control system Included



• AF-5 With AF-5-HB Hanging Bracket (Optional)



ANTARI FBN
AF-5



• DMX & Wireless Module



• Fan Speed Control



• W-1 Wireless Transmitter (Optional)

AF-3 / AF-3X Effects Fan

The AF-3 is a mini but all-purpose stage fan features 4 control options, linear output control, low power consumption, adjustable blowing directions, durable metal housing and compact size. In addition to the onboard DMX control and the manual knob, wire and wireless controllers are optional to cope with diverse needs. Total power consumption is merely 100W. The attached bracket enables various output directions within 90 degrees while hanged or placed on the floor. Solid and handy design allows easy carry and storage.

AF-3 Specification

- Voltage : U.S. version : 120 Volt
Europe version : 230 Volt
U.K. version : 240 Volt
Japan version : 100 Volt
- Power Consumption : AC-120V/230V, 100W
- Maximum Airflow : 900m3/hr, 530CFM (50Hz) ,
1020m3/hr, 600CFM (60Hz)
- Fan Speed : 750~2550 rpm (50Hz) , 750~2800 rpm (60Hz)
- Powercon Output : Included
- Control Included : On-board DMX and Rotary Knob
- Optional Remotes : W-1 Wireless Remote / Z-3 Remote
- DMX Mode : 1 Channel (0-100% volume level)
2 Channel (0-100% volume level, On/Off)
- Dimension (mm) : 332.9 (W) x 370 (H)
- Weight : 6 kg

AF-3X Specification

- Powercon Output : Not included



ANTARI FBN
AF-3



• AF-3 Effect (angle of 180)



• AF-3 Effect (angle of 45)



• AF-3 Effect (Hanging Style)



• W-1 Wireless Transmitter (Optional)



• Z-3 Remote (Optional)



Antari liquid
Extract From Palm tree



Antari Liquid

Antari Fog liquids are optimized for use with all Antari fog machines and are suitable for most models of foggers. They are all water-based composition that leaves no oily residue.

All of the liquid are odorless, non-irritating, non-toxic, and non-flammable. They preserve the longevity of your machines.

Our Material Safety Data Sheets (MSDS) and safety reports from SGS are complied by an independent laboratory for strictest tests.

The Antari fog liquid are eco-friendly to our environment and to human contact.

Antari Fog liquid comes in 3 varieties :

FLC Super Fast Dissipating (clear) produces fog which dissipates in the air fastest.

FLR Light Fog Liquid (red color) produces fog which disappears in the air faster.

FLG Heavy Fog Liquid (green color) produces fog which has a longer lasting time.

They are available in 1, 4, 5, 6, 10, 20 and 200 Liters.

FLR : FLR-1, FLR-4, FLR-5, FLR-6, FLR-10, FLR-20

FLG : FLG-1, FLG-4, FLG-5, FLG-5E, FLG-6, FLG-10, FLG-20

*the number -1, -4, -5, -6, -10, -20 indicates the volume in liters.

The choice of fog liquid will depend on which Antari machine is used and also the density of fog you look for.



5L

FLC Water Based Fluid

FLC water based fluid is specially designed for fog Jet, makes the effect more perfect and precise with a fast-dissipating formula.



1L

5L

Haze Liquid

- HZL-1 : Specially composed haze liquid, HZL-1 is a non-toxic solution that produces a pure, translucent haze with an extremely long hanging time and low moisture content. Colorless, odorless and non-flammable, HZL-1 leaves no residue or contamination and complies with the strictest health and safety regulations.

- HZL-1 : Haze Liquid (1 liter)

- HZL-5 : Haze Liquid (5 liter)

- It's composition will increase machine's lifespan for HZ-100 / 350 / 400 / 500



6L

FLP Fog Liquid

Antari FLP Fog Liquid specifically made for Fire Training purpose.

Product Features :

- The ingredients of this water-based fog liquid are refined from palm trees.

- It is 100% natural, completely non-toxic and safe.

- It can produce high density fog and is ideal for using in poor ventilation environments (such as fire drill or rescue training...etc.)



1L

5L

Bubble Liquid

Designed for use in the Bubble Machines.

Antari Bubble Liquid is a water-based composition that creates vivid, transparent bubbles. The liquid is colorless, odorless and non-flammable.

The Antari bubble liquid is available in either one or five liter containers.

- BL-1 : Bubble Liquid (1 liter)

- BL-5 : Bubble Liquid (5 liter)



5L

Snow Liquid

- SL-5 : Designed for use in either Snow Machine or the S-120 Foam Machine. SL-5 Snow liquid is a water-based formula that is safe, non-toxic and 100% biodegradable. S-120 Foam Machine can only work with SL-5.

- SL-5A : Premium Snow liquid is uniquely designed for the Snow Machine SL-5A produces fast-dissipating "snowflakes" without leaving any residue behind.

- 5 liter tank size is the same as the tank of SW-250 / S-100X / S-200X / S-120

- SL-20 : Snow liquid (20 liter)

- SL-200 : Snow liquid (200 liter)



20L



200L

SL-200



300ml

C-300

Antari C-300 is a cleaning solution that you can use to clean and maintain Antari fog and snow machines. Using it properly and regularly can give you the best performance and the longest lifetime of products.



500ml

FLM-05 / M-1 Fog Liquid

The FLM-05 is the Fog liquid especially tailored for M-1 Fogger, with best quality no artificial colors are added and can generates the best, pure, and clean fog when goes with the M-1 model!

It is 500ml per bottle.



Essence

Simply put a few drops of these high quality essence into the fluid tank. You will have scented fog right away! 5 fragrances are available in a standard 20 ml bottle. The ideal mix ratio of essence and fog liquid is 1:1000 For instance: adding 1ml essence into 1liter fog liquid can have the best effect of scented fog.

P-1 : Rose P-2 : Mint P-4 : Apple
P-6 : Lemon P-7 : Strawberry

MG-550 Magican

The world's smallest spray hazer; the Magican produces a long lasting haze with 1-2 hours of hanging time. One Magican will haze continuously for five minutes.

A haze effect can be achieved after approximately 20 seconds of spraying in an average sized room, allowing for approximately 15 hazing sessions per can.

The Magican is designed for situations where only a relatively small amount of haze is needed. It is perfect for mobile DJs and home parties.

Control Module



W-2 Wireless Radio Transmitter

W-2 is the advanced version of W-1 wireless radio transmitter. Compare to W-1, the biggest difference is W-2 comes with 4 buttons, which makes it more versatile.

- Working Distance : Wireless, up to 50 M
- Function : Wireless ON/OFF
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : Z-1520, M-7 RGBA, FT-100



W-1 Wireless Radio Transmitter

- Working Distance : Wireless, up to 50 M
- Function : Wireless ON/OFF
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : W-715, W-101, W-508, W-510, W-515, W-530, IP-1500, HZ-350, SW-250, AF-5, AF-3

Main Features:

1. Simple setting and operation : one click to register ; one click to go ; and one click to stop.
2. Interchangeability : A W-1 wireless radio transmitter is compatible with all Antari W series (signal receivers)
3. Modern metallic design honors your vision and professional.



WTR-10

- 1 x W-1 Transmitter
- 1 x W-1 Receiver
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : F-1R, W-508, W-510, W-515, W-530



WTR-20

- 1 x W-2 Transmitter
- 1 x W-2 Receiver
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : Z-1520, M-7 RGBA



WTR-30

- 1 x W-1 Transmitter
- 1 x W-2 Receiver
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : M-4R



WTR-40

- 1 x W-1 Transmitter
- 1 x W-1 & W-DMX Receiver with W-DMX PCB
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : W-515D & W-530D



WTR-50

- 1 x W-1 Transmitter
- 1 x W-1 & W-DMX Receiver without W-DMX PCB
- There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : W-515D & W-530D

W-DMX-PCBR

W-DMX PCB + Receiver



- Compatible With : F-1D, F-5D, F-7, M-4D, M-7 RGBA W-515D, W-530D

W-DMXR

W-DMX Receiver



- Compatible With : F-1D, F-5D, F-7, M-4D, M-7 RGBA W-515D, W-530D

W-DMX-PCB

W-DMX PCB



- Compatible With : F-1D, F-5D, F-7, M-4D, M-7 RGBA W-515D, W-530D

**D-20**

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; 4 Volume output choices (with non-stop fogging); Set DMX addresses; manual ON/OFF. (All above functions are displayed on a LCD screen & can be set precisely in seconds or percentage)
- Compatible With : DNG-200

**M-20**

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF. (All above functions are displayed on a LCD screen and can be set precisely in seconds or percentage)
- Compatible With : M-5, M-10

**M-21**

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; manual ON/OFF. (All above functions are displayed on a LCD screen)
- Compatible With : M-8

**M-30PRO**

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : M-5, M-10

The M-30PRO Wireless Control Module, as its name suggests, adds wireless operation to your M Series machines. The M-30PRO delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

**M-31**

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : M-8

The M-31 Wireless Control Module, as its name suggests, adds wireless operation to your M Series machines. The M-31 delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

**X-10PRO**

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF. (All above functions are displayed on a LCD screen and can be set precisely in seconds or percentage)
- Compatible With : Full X-PRO Series
- DMX Channel used : 1 channel for X-510PRO / X-515PRO Fogger
2 channels for X-310PRO Fazer

**X-30PRO**

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : Full X-PRO Series

**Z-20**

- Cable Length : 2 M
- Connector : 5 Pin XLR
- Function : Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF. (All above functions are displayed on a LCD screen and can be set precisely in seconds or percentage)
- Compatible With : Z-1500II, Z-3000II

The X-30PRO Wireless Control Module, as its name suggests, adds wireless operation to your X-PRO Series machines. The X-30PRO delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

**Z-30PRO**

- Cable Length : 2 M
- Working Distance : Wireless, up to 50 M
- Connector : 5 Pin XLR
- For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.
- Compatible With : Z-1500II, Z-3000II

The Z-30PRO Wireless Control Module, as its name suggests, adds wireless operation to your Z-Series machines. The Z-30PRO delivers radio frequency technology you can depend on. You have the flexibility of wireless technology and the functionality you expect from Antari.

📶 Wireless distance may vary depending on the interference.

**Z-3 Remote**

- Cable Length : 3M
- Connector : 1/4 Stereo
- Function : Volume , ON/OFF
- Compatible With : Z-350, AF-3, FT-100

**Z-50 Wireless Remote**

- Working Distance : Wireless, up to 50 M
- Connector : 1/4 Stereo
- Function : Wireless ON/OFF
- Compatible With : Z-800II, Z-1000II, Z-1020

**Z-6 Timer Remote**

- Cable Length : 25 ft
- Connector : 5 Pin DIN
- Function : Timer with volume and duration;
Continuous Hazing; manual ON/OFF
- Compatible With : Z-300II

**Z-9 Wireless Remote**

- Working Distance : Wireless, up to 50 M
- Connector : 4 Pin XLR
- Function : Wireless ON/OFF
- Compatible With : Z-1200II, LCU-1

**Z-8 Timer Remote**

- Cable Length : 25 ft
- Connector : 4 Pin XLR
- Function : Timer with interval, duration and volume;
continuous fogging; manual ON/OFF
- Compatible With : Z-1200II, LCU-1, ICE-101

**Z-40 Timer Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : Z-800II, Z-1000II, Z-1020

**BCR-1 Wireless Remote**

- Working Distance : Wireless, up to 50 M
- Connector : 1/4 Stereo
- Function : Wireless ON/OFF
- Compatible With : B-100X, B-200

**BCT-1 Timer Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : B-100X, B-200

**HCR-1 Wireless Remote**

- Working Distance : Wireless, up to 50 M
- Connector : 1/4 Stereo
- Function : Wireless ON/OFF
- Compatible With : HZ-100, HZ-400

**HC-1 Timer Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : Timer with interval and duration; manual ON/OFF
- Compatible With : HZ-100, HZ-350, HZ-400

**MCR-1 Wireless Remote**

- Working Distance : Wireless, up to 50 M
- Connector : 4 Pin S Terminal
- Function : Wireless ON/OFF
- Compatible With : M-1

**SC-2 Remote**


- Cable Length : 25 ft
- Connector : 4 Pin XLR
- Function : ON/OFF and volume
- Compatible With : S-100X, S-200X, SW-250

**Z-10 Remote**

- Cable Length : 25 ft
- Connector : 1/4 Stereo
- Function : ON/OFF (Toggle Switch)
- Compatible With : Z-800II, Z-1000II, Z-1020, B-100X, B-200, HZ-350

📶 Wireless distance may vary depending on the interference.

Accessories

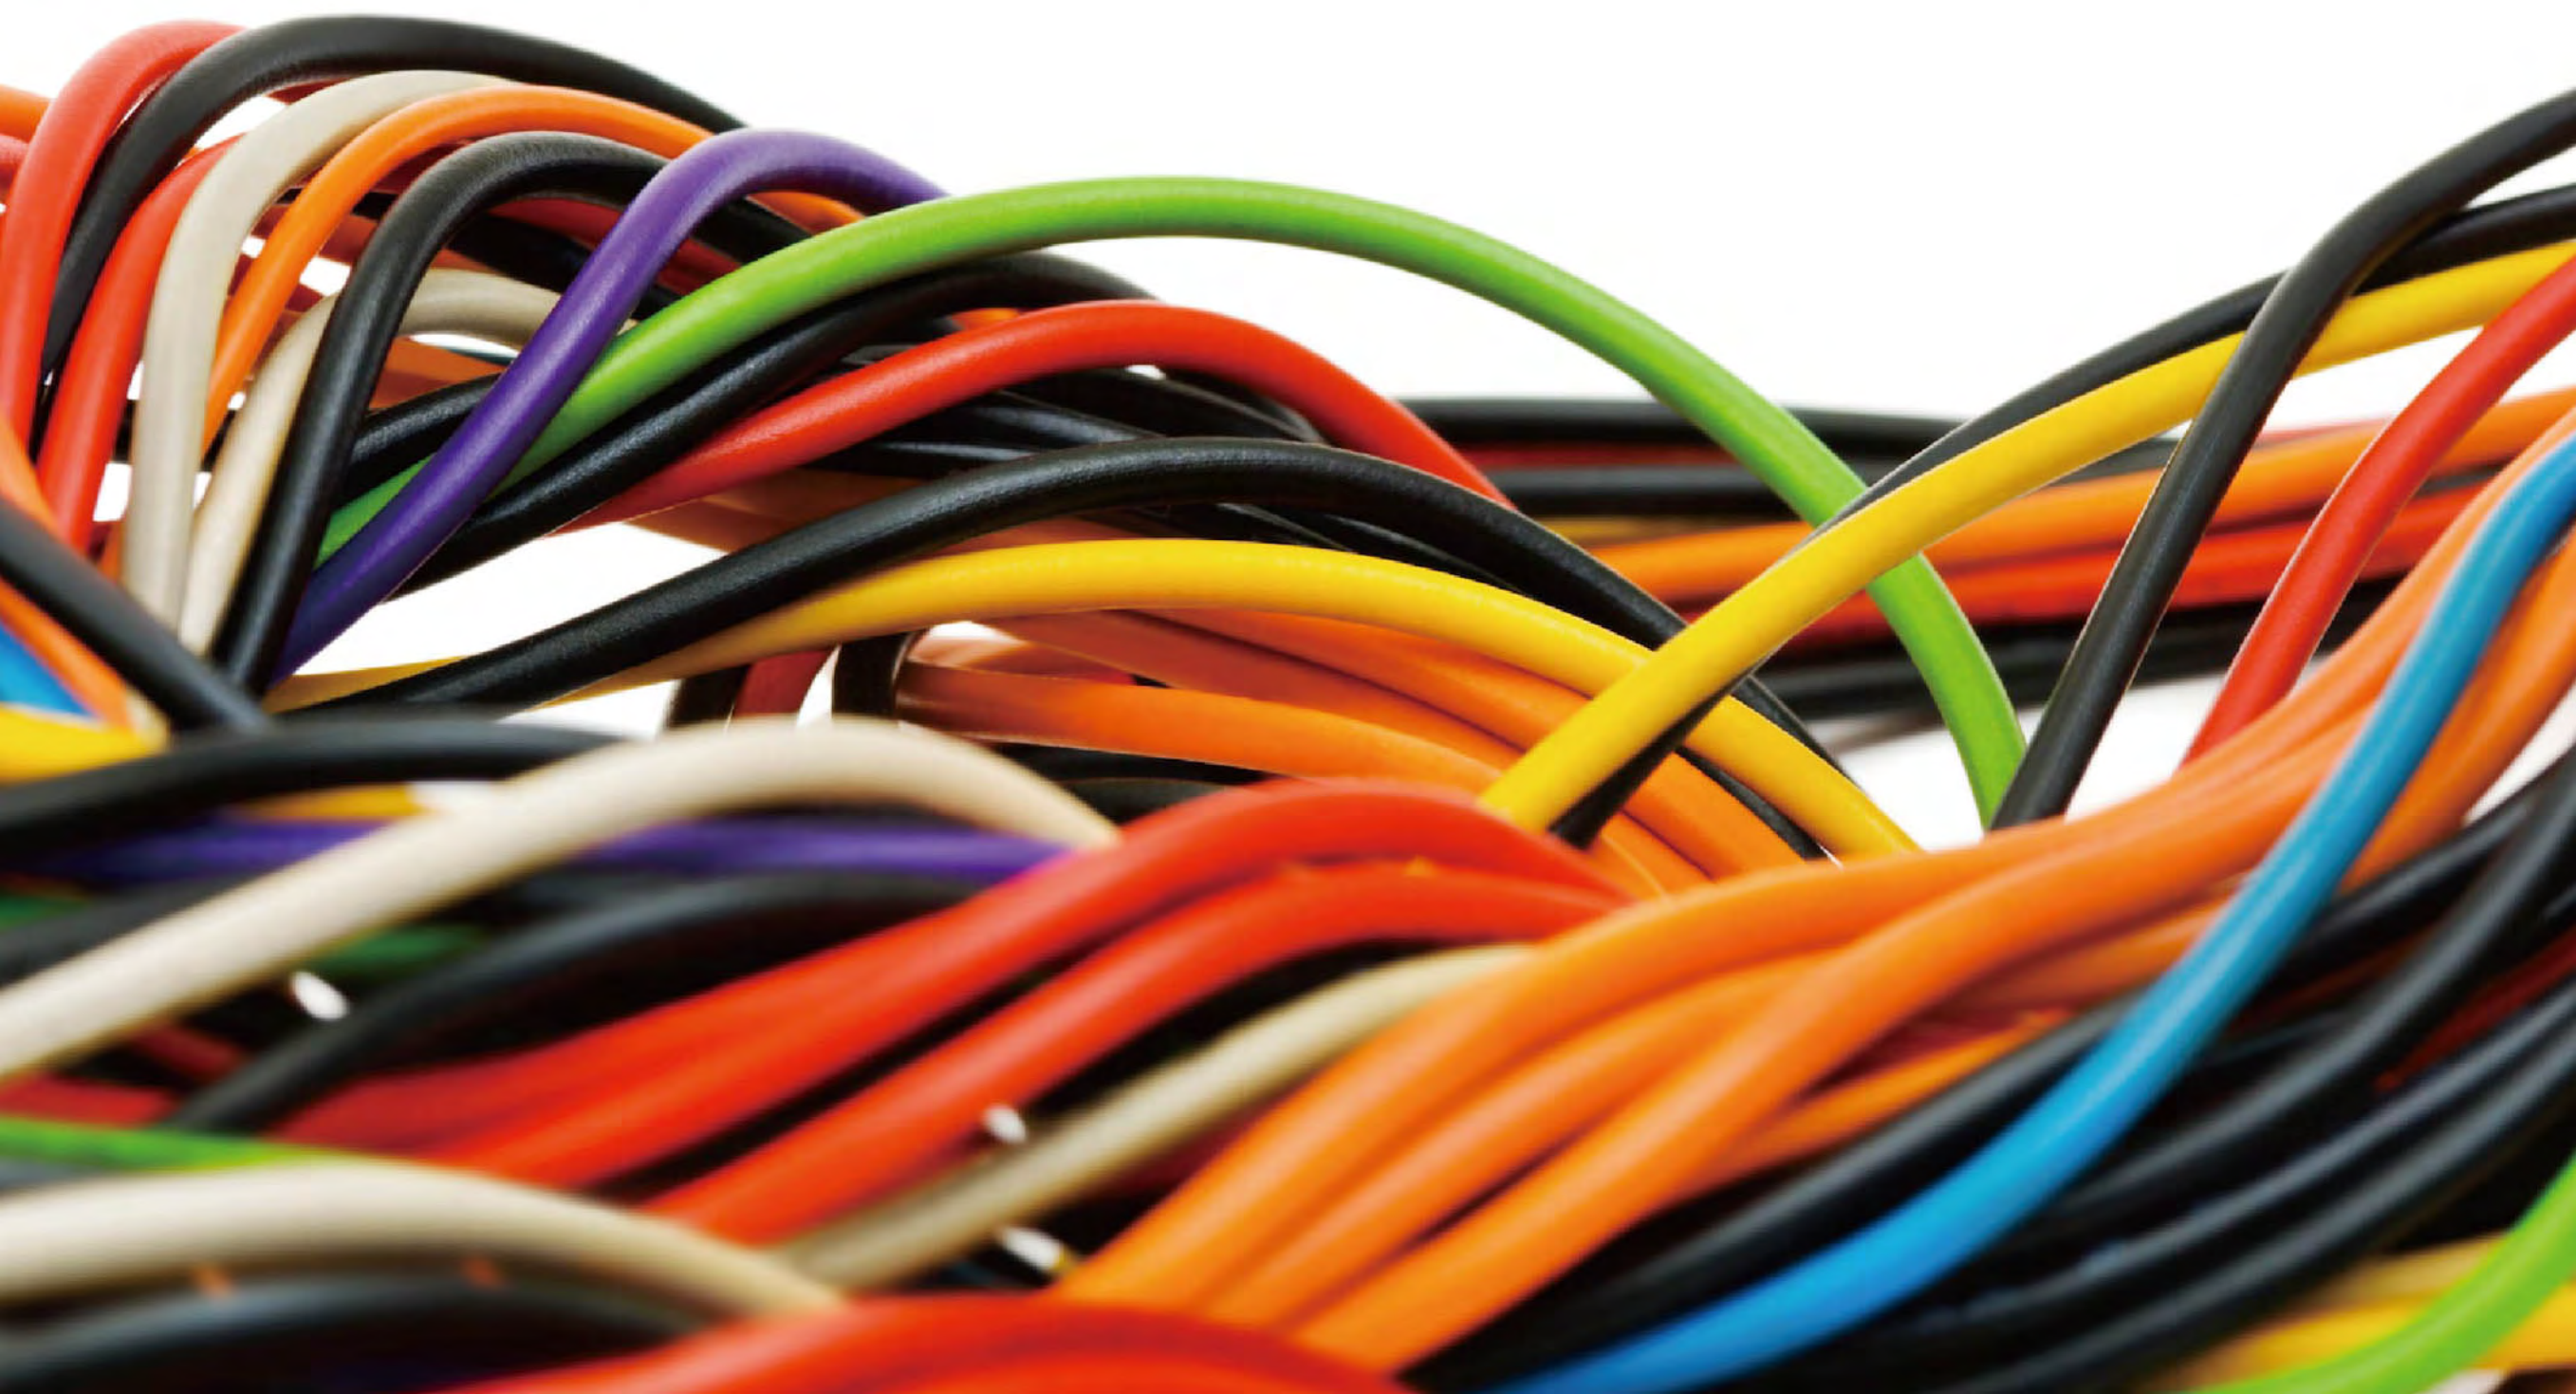



M-5-HB

W-510-HB
W-515-HB

HB-10

Hanging Bracket Sets

- HB-10 : Hanging Bracket and Drip Tray For X-510PRO & X-515PRO
- M-5-HB : Hanging Bracket For M-5, M-8
- W-510-HB : Hanging Bracket For W-510
- W-515-HB : Hanging Bracket For W-515, W-530

Liquid Tubes/Adaptors/Filters

- FT-4 : 4mm liquid tube
- FT-6 : 6mm liquid tube
- FLF-4 : Liquid filter for 4mm tube
- FLF-6 : Liquid filter for 6mm tube
- FTA-64 : Adaptor for 4mm to 6mm tube connection
- FTA-66 : Adaptor for 6mm to 6mm tube connection
- FTA-664 : T-type adaptor for two 6mm tubes to one 4mm tube connection



EXT-1



EXT- 3/4/6



EXT-5

Remote Control Extension Cables

- EXT-1 : 25 ft. extension cable with 1/4 stereo plug
- EXT-3 : 25 ft. extension cable with 5-pin XLR connectors
- EXT-4 : 25 ft. extension cable with 3-pin XLR connectors
- EXT-5 : 25 ft. extension cable with 5-pin DIN connectors
- EXT-6 : 25 ft. extension cable with 4-pin XLR connectors



FTA-1

FTA-2A

FTA-3

Fog Hose Adaptor

Adaptor for connecting fog conducting hose FT-10 for DNG-100 Fog Cooler to the desired Antari fog machine.

- FTA-1 : Adaptor for connecting fog conducting hose FT-10 to M-5, M-10, W-510, W-515D and W-530D fog machines, in order to achieve strategic fog placement.
- FTA-2A : The same function as the FTA-1, specifically designed for Z-1000II and Z-1200II fog machines.
- FTA-3 : The same function as the FTA-1, specifically designed for Z-1500II and Z-3000II fog machines.



Fog Conducting Hose FT-10

Fog conducting hose with 12cm diameter and is 10 meters in length.

The DNG-100 Low fog cooler is equipped with one FT-10 to connect to the fog machine. This additional hose is needed to redirect the fog output coming out of the DNG-100.

With this optional hose, fog can be extended anywhere within 10m of the DNG-100.



FTA-200 Fog Conducting Hose Adaptor

Fog conducting hose adaptor for DNG-200.

The hoses adaptor can be installed on it and this can split low fog output into two.



FTA-11

Fog conducting hose adaptor for DNG-100.

The hoses adaptor can be installed on it and this can split low fog output into two.



FDNG-200

- Dimensions (mm) : L 865 W 695 H 1020
- Weight : 46.5 Kg
- Compatible With : DNG-200



FX-4

- Dimensions (mm) : L 495 W 418 H 500
- Weight : 12.3 Kg
- Compatible With : Z-1020 , Z-1520 , W-715 , Z-350



FX-5 new

- Dimensions (mm) : L 844 W 453 H 378
- Weight : 12.3 Kg
- Compatible With : M-5 , M-8 , M-10 , W-515D , W-530D





*Watch when eliminated its fashion character is just a tool to communicate time.
Yet time itself is a one way street of no return.*

To use watch as a token of appreciation has got started accidentally without any plan in advance...

Antari attends many international exhibitions annually since its establishment to promote our products or to support our distributors. We always want to convey our hospitality to all visitors who stop by for any kinds of supports at the booth by greeting them with a gift, a gift of memory.

Yet this gift has to be practical, it has to be easy to carry, not to add any burden to traveling, particularly most of the business visitors have already had a ton to carry, and this gift must be able to integrate with our product concept. Overall, the most important thing about this gift is it has to be liked by almost all recipients.

Hence, using watch as a special gift was started in year 2002. Until today, we connect the concept or the image of our annual new model to decide our style of watch. Then engrave the year, and the represented Antari model on the back of the watch. A total one thousand of watch is produced in a limited edition format to present to Antari's supporters at the exhibition booth.

At present time, many customers and friends are longing for the new annual new watch, even its packaging have become favorite stationary box or box of treasures of many clients' kids. Furthermore, we found on internet auction sites, there are collectors start looking for previous years' watches, hoping to make it a complete set.

We have often seen our visitors come to our booth wearing the watch we gave them few years back. Some of them must have the battery replaced, some watch bands have shown the signs of wear, yet they run as precise as they should be and can be. While the watch carries its mission, its duty to report the time, we seem to feel a consensus and acknowledgements from around the world in various countries are reached and recognized synchronically. No time difference!

A decade, ten different watches, time seems flashes away, but not the record that has been built. The faithful spirit will be carried on. When the watch box is opened, we know we will see the full of surprise and satisfactory smile from our recipients face, it really makes us feeling full of joy.



2015
M-7 Series



2003
Original Version



2004
X-Series



2005
X-Series



2006
ZII-Series



2007
ZII-Series



2008
M-5 Series



2009
HZ-500 Series



2010
DNG-200 Series



2011
W-Series



2012
ECO-Series



2013
Z-Series



2014
F-5 Series

Specification

MODEL	HEATER	WARM UP TIME	FOG OUTPUT (Cuft / min)	TANK (LITER)	HANGING BRACKET	REMOTE CONTROL INCLUDED	DMX ON-BOARD	W-DMX ON-BOARD		MODEL	TIMER REMOTE	WIRELESS REMOTE	25 ft. REMOTE EXTENSION	COMPATIBLE WITH DNG-100	DNG-100 ADAPTOR	MACHINE LINKABLE
new F-7 Smaze	1750W (120V)	7.5 min	N/A	10	N/A	W-DMX	YES	YES		new F-7 Smaze	N/A	N/A	N/A	YES	FTA-1	YES
new F-7 Smaze	1650W (230V)	7.5 min	N/A	10	N/A	W-DMX	YES	YES		new F-7 Smaze	N/A	N/A	N/A	YES	FTA-1	YES
new F-1 Fazer	790W (120V)	4.3 min	N/A	2.4	N/A	NO	YES	Optional		new F-1 Fazer	N/A	WTR-10A (Optional)	N/A	NO	N/A	YES
new F-1 Fazer	700W (230V)	4.3 min	N/A	2.4	N/A	NO	YES	Optional		new F-1 Fazer	N/A	WTR-10E (Optional)	N/A	NO	N/A	YES
new M-7 RGBA	1550W (120V)	5 min	N/A	2.4	N/A	W-2	YES	Optional		new M-7 RGBA	N/A	W-2	N/A	NO	N/A	YES
new M-7 RGBA	1550W (230V)	5 min	N/A	2.4	N/A	W-2	YES	Optional		new M-7 RGBA	N/A	W-2	N/A	NO	N/A	YES
new M-4	1500W (120V)	4.5 min	N/A	2.4	N/A	NO	YES	Optional		new M-4	N/A	WTR-30A (Optional)	N/A	NO	N/A	YES
new M-4	1500W (230V)	4.5 min	N/A	2.4	N/A	NO	YES	Optional		new M-4	N/A	WTR-30E (Optional)	N/A	NO	N/A	YES
new FT-100	1500W	10 min	20000 ml / min	6	N/A	W-2	YES	N/A		new FT-100	Z-3 (Optional)	W-2	EXT-1	YES	FTA-1	YES
W-715 Fog Jet	1500W (120V)	9 min	300 ml / min	2.4	N/A	W-1	YES	N/A		W-715 Fog Jet	N/A	N/A	N/A	NO	N/A	YES
W-715 Fog Jet	1600W (230V)	8.5 min	300 ml / min	2.4	N/A	W-1	YES	N/A		W-715 Fog Jet	N/A	W-1	N/A	NO	N/A	YES
Z-1520 RGB	1550W	4.5 min	150 ml / min	2.4	N/A	W-2	YES	N/A		Z-1520 RGB	N/A	W-2	N/A	NO	N/A	YES
F-5D Fazer	850W	4 min	8 ml / min	2.8	N/A	W-DMX	YES	YES		F-5D Fazer	N/A	N/A	N/A	NO	N/A	YES
Z-350	800W	N/A	3 ml / min	1.3	N/A	N/A	YES	N/A		Z-350	Z-3 (Optional)	N/A	EXT-1	NO	N/A	YES
WiFi-800	800W	N/A	3000	0.8	N/A	iOS & Android System 🍏🤖	N/A	N/A		WiFi-800	Z-10 (Optional)	iOS & Android System 🍏🤖	EXT-1	NO	N/A	YES
AF-3 / AF-3X	72W (120V)	N/A	N/A	N/A	YES	NO	YES	N/A		AF-3 / AF-3X	Z-3 (Optional)	WTR-10A (Optional)	EXT-1	NO	N/A	YES
AF-5 / AF-5R	74W (230V)	N/A	N/A	N/A	YES	W-1 (For AF-5R Only)	YES	N/A		AF-5 / AF-5R	N/A	W-1 (For AF-5R Only)	N/A	NO	N/A	YES
B-100	25W	N/A	N/A	1.0	YES	N/A	N/A	N/A		B-100	N/A	N/A	N/A	NO	N/A	N/A
B-100X	36W	N/A	N/A	1.0	YES	NO	N/A	N/A		B-100X	BCT-1 (Optional)	BCR-1 (Optional)	EXT-1	NO	N/A	N/A
B-200	100W	N/A	N/A	2.0	YES	NO	YES	N/A		B-200	BCT-1 (Optional)	BCR-1 (Optional)	EXT-1	NO	N/A	YES
DNG-100	750W	N/A	N/A	N/A	N/A	N/A	N/A	N/A		DNG-100	N/A	N/A	N/A	-	-	N/A
DNG-200	1400W(120V)	24min(120V)	12000	10	N/A	D-20	YES	N/A		DNG-200	D-20	N/A	EXT-3	-	-	YES
DNG-200	2500W(230V)	12min(230V)	12000	10	N/A	D-20	YES	N/A		DNG-200	D-20	N/A	EXT-3	-	-	YES
HZ-100	75W	N/A	1000	2.5	N/A	NO	N/A	N/A		HZ-100	HC-1 (Optional)	HCR-1 (Optional)	EXT-1	NO	N/A	N/A
HZ-350	375W	N/A	2000	2.5	N/A	W-1	YES	N/A		HZ-350	HC-1 (Optional)	W-1	EXT-1	NO	N/A	YES
HZ-400	560W	N/A	2800	2.5	N/A	HC-1	YES	N/A		HZ-400	HC-1	HCR-1 (Optional)	EXT-1	NO	N/A	YES
HZ-500	500W	N/A	3000	2.5	N/A	N/A	YES	N/A		HZ-500	N/A	N/A	N/A	NO	N/A	YES
ICE-101	1000W	4.5min	10000	2.5	N/A	Z-8	YES	N/A		ICE-101	Z-8	N/A	EXT-6	NO	N/A	YES
IP-1000	1000W	10min	15000	N/A	N/A	IP-10	N/A	N/A		IP-1000	N/A	N/A	N/A	YES	FTA-1	N/A
IP-1500	1500W	10min	20000	N/A	YES	W-1	YES	N/A		IP-1500	N/A	W-1	N/A	YES	FTA-1	YES
LCU-1	54W	Machine Dependable	N/A	N/A	N/A	Machine Dependable	YES	N/A		LCU-1	Z-8 (Optional)	Z-9 (Optional)	EXT-6	NO	N/A	YES
M-1	75W / 12V	N/A	300	110cc	N/A	N/A	N/A	N/A		M-1	MCT-1 (Optional)	MCR-1 (Optional)	N/A	NO	N/A	N/A
M-5	1500W	8min	20000	10	M-5-HB (Optional)	M-20	YES	N/A		M-5	M-20	M-30PRO (Optional)	EXT-3	YES	FTA-1	YES
M-8	1800W	9min	50000	10	M-5-HB (Optional)	M-21	YES	N/A		M-8	M-21	M-31 (Optional)	EXT-3	YES	FTA-1	YES
M-10	3000W	13min	50000	10	N/A	M-20	YES	N/A		M-10	M-20	M-30PRO (Optional)	EXT-3	YES	FTA-1	YES
S-100X	1150W (Max Output)	N/A	200 ml / min	5.0	YES	N/A	YES	N/A		S-100X	SC-2	N/A	EXT-6	NO	N/A	YES
S-120 Foam	600W	N/A	320 ml / min	5.0	YES	N/A	N/A	N/A		S-120 Foam	N/A	N/A	N/A	NO	N/A	N/A
S-200X	1150W (Max Output)	N/A	200 ml / min	5.0	YES	N/A	YES	N/A		S-200X	SC-2	N/A	EXT-6	NO	N/A	YES
SW-250	1290W (Max Output)	N/A	240 ml / min	5.0	YES	W-1	YES	N/A		SW-250	SC-2 (Optional)	W-1	EXT-6	NO	N/A	YES
W-101	25W	N/A	N/A	1.0	YES	W-1	N/A	N/A		W-101	N/A	W-1	N/A	NO	N/A	N/A
W-508	800W	1.5min	3000	0.8	N/A	W-1	N/A	N/A		W-508	N/A	W-1	N/A	NO	N/A	N/A
W-510	1000W	13.5min	15000	2.8	W-510-HB (Optional)	W-1	YES	N/A		W-510	N/A	W-1	N/A	YES	FTA-1	YES
W-515D	1500W	10min	20000	6	W-515-HB (Optional)	W-DMX	YES	YES		W-515D	N/A	W-1	N/A	YES	FTA-1	YES
W-530D	3000W	12min	40000	6	W-515-HB (Optional)	W-DMX	YES	YES		W-530D	N/A	W-1	N/A	YES	FTA-1	YES
X-310PRO	1000W	10min	3500	2.4	N/A	X-10PRO	YES	N/A		X-310PRO	X-10PRO	X-30PRO (Optional)	EXT-3	NO	N/A	YES
X-510PRO	1000W	11min	10000	2.8	HB-10 (Optional)	X-10PRO	YES	N/A		X-510PRO	X-10PRO	X-30PRO (Optional)	EXT-3	YES	FTA-1	YES
X-515PRO	1500W	8.5min	20000	6.0	HB-10 (Optional)	X-10PRO	YES	N/A		X-515PRO	X-10PRO	X-30PRO (Optional)	EXT-3	YES	FTA-1	YES
Z-800II	800W	1.5min	3000	0.8	N/A	Z-10	N/A	N/A		Z-800II	Z-40 (Optional)	Z-50 (Optional)	EXT-1	NO	N/A	N/A
Z-1000II	1000W	5.5min	12000	1.7	YES	Z-10	YES	N/A		Z-1000II	Z-40 (Optional)	Z-50 (Optional)	EXT-1	YES	FTA-2A	YES
Z-1020	1000W	10min	16000	2.4	N/A	Z-10	YES	N/A		Z-1020	Z-40 (Optional)	Z-50 (Optional)	EXT-1	NO	N/A	YES
Z-1200II	1200W	9min	18000	2.5	YES	Z-8	YES	N/A		Z-1200II	Z-8	Z-9 (Optional)	EXT-6	YES	FTA-2A	YES
Z-1500II	1500W	8.5min	20000	6.0	N/A	Z-20	YES	N/A		Z-1500II	Z-20	Z-30PRO (Optional)	EXT-3	YES	FTA-3	YES
Z-3000II	3000W	12min	40000	6.0	N/A	Z-20	YES	N/A		Z-3000II	Z-20	Z-30PRO (Optional)	EXT-3	YES	FTA-3	YES

