

## Product Description:

Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The T Powered Series delivers extraordinary performance at unmatched value.


## Key Features and Benefits:

- High output SPL and sensitivity
- 1 x 10" high powered low frequency driver
- 1 x 1.4" compression driver
- Built-in Class D power amplifier module
- Mic line selector switch
- Master volume control
- DSP switch, flat, music and low cut
- 90° x 60° controlled coverage
- Computer aided Polyurethane plastic cabinet design
- Cabinet design for FOH and monitor use (integrated monitor feet)
- SMART pole mount to include 5° tilt
- M8 rigging points for installation
- Powder coated grill
- Portable system or permanent installation



## System Specifications:

Construction	Plastic
Transducers	1 x 1.4" HF Compression Driver + 1 x 10" LF
Crossover	1.8kHz
Frequency Response (-3dB)	55Hz-20kHz
Rated Power	550W
Maximum SPL (1W @ 1m)	124dB
Rated Impedance	8Ω
Dispersion (H x V)	90° x 60°
Connector	2 x XLR
Dimensions (W x D x H)	306mm x 238mm x 516mm
Packaging Dimensions (1 piece/pack)	355mm x 355mm x 602mm
Net Weight (1 piece/pack)	13.8kg
Gross Weight (1 piece/pack)	15.3kg
Warranty	3 years

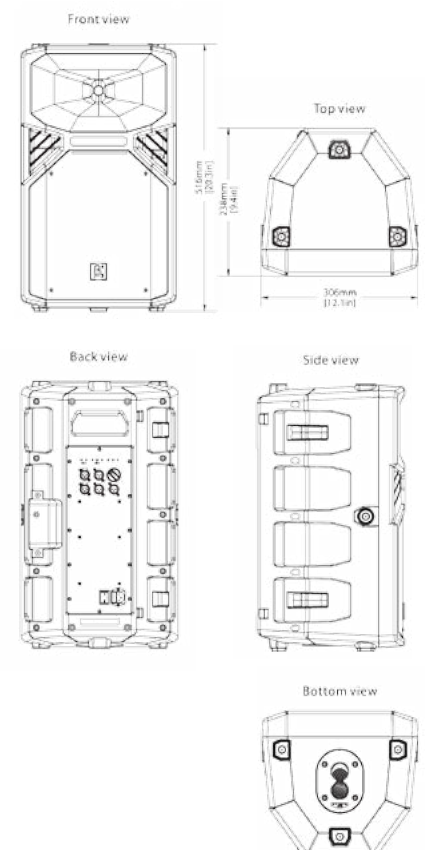

## Product Description:


Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The T Powered Series delivers extraordinary performance at unmatched value.

## Key Features and Benefits:


- High output SPL and sensitivity
- 1 x 12" high powered low frequency driver
- 1 x 1.7" compression driver
- Built-in Class D power amplifier module
- Mic line selector switch
- Master volume control
- DSP switch, flat, music and low cut
- 90° x 60° controlled coverage
- Computer aided Polyurethane plastic cabinet design
- Cabinet design for FOH and monitor use (integrated monitor feet)
- SMART pole mount to include 5° tilt
- M8 rigging points for installation
- Powder coated grill
- Portable system or permanent installation




Front view




Top view




Back view



Side view



Bottom view



## System Specifications:

Construction	Plastic
Transducers	1 x 1.7" HF Compression Driver + 1 x 12" LF
Crossover	1.8kHz
Frequency Response (-3dB)	50Hz-20kHz
Rated Power (RMS)	1100W
Maximum SPL (1W @ 1m)	130dB
Rated Impedance	8Ω
Dispersion (H x V)	90° x 60°
Input Connectors	2 x XLR
Dimensions (W x D x H)	368mm x 349mm x 630mm
Packaging Dimensions (1 piece/pack)	420mm x 420mm x 720mm
Net Weight (1 piece/pack)	21.5kg
Gross Weight (1 piece/pack)	23.5kg
Warranty	3 years

## Product Description:


Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The T Powered Series delivers extraordinary performance at unmatched value.

## Key Features and Benefits:


- High output SPL and sensitivity
- 1 x 15" high powered low frequency driver
- 1 x 1.7" compression driver
- Built-in Class D power amplifier module
- Mic line selector switch
- Master volume control
- DSP switch, flat, music and low cut
- 90° x 60° controlled coverage
- Computer aided Polyurethane plastic cabinet design
- Cabinet design for FOH and monitor use (integrated monitor feet)
- SMART pole mount to include 5° tilt
- M8 rigging points for installation
- Powder coated grill
- Portable system or permanent installation




Front view




Top view




Back view



Side view



Bottom view



## System Specifications:


Construction	Plastic
Transducers	1 x 1.7" HF Compression Driver + 1 x 15" LF
Crossover	1.8kHz
Frequency Response (-3dB)	45Hz-20kHz
Rated Power	1100W
Maximum SPL (1W @ 1m)	133dB
Rated Impedance	8Ω
Dispersion (H x V)	90° x 60°
Connector	2 x XLR
Dimensions (W x D x H)	460mm x 396mm x 780mm
Packaging Dimensions (1 piece/pack)	472mm x 540mm x 860mm
Net Weight (1 piece/pack)	28.7kg
Gross Weight (1 piece/pack)	31kg
Warranty	3 years

## Product Description:

Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The T Powered Series delivers extraordinary performance at unmatched value.

## Key Features and Benefits:

- High output SPL and sensitivity
- 2 x 12" high powered low frequency drivers
- 2000w power amplifier built in
- Volume control
- High cut control on output
- Computer aided design to optimise frequency and phase response
- Suitable for use as a main subwoofer system with or without T Series augmentation
- Suitable for use with any full range or mid/high speaker cabinets for extended low frequency, high quality music reproduction
- Integral 35mm pole receptacle for mounting full range or mid/high speaker cabinets
- Portable system or permanent installation (floor only)

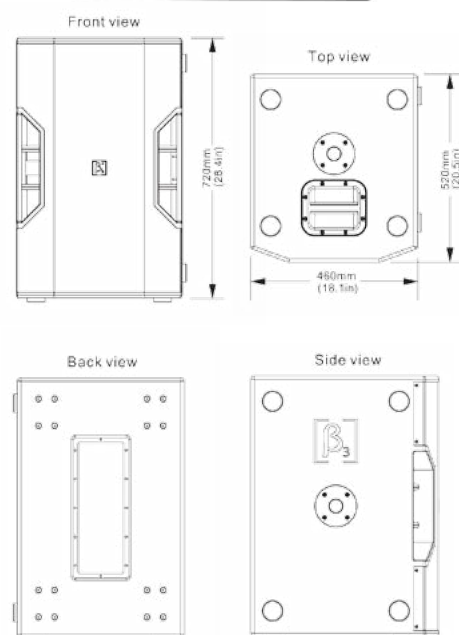

## System Specifications:

Construction	15mm Birch ply
Transducers	2 x 12" LF
Frequency Response (-3dB)	31.5Hz-120kHz
Rated Power	2000W
Maximum SPL (1W @ 1m)	135dB
Rated Impedance	4Ω
Connector	2 x XLR
Dimensions (W x D x H)	460mm x 520mm x 720mm
Packaging Dimensions (1 piece/pack)	568mm x 620mm x 828mm
Net Weight (1 piece/pack)	41.7kg
Gross Weight (1 piece/pack)	45.5kg
Warranty	3 years